


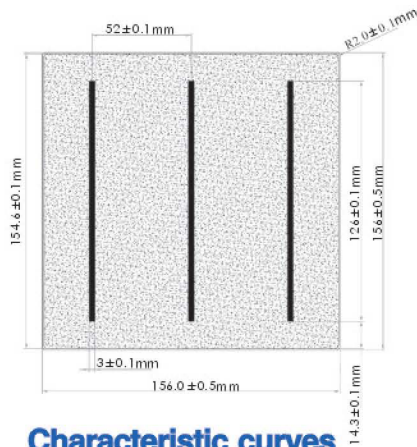


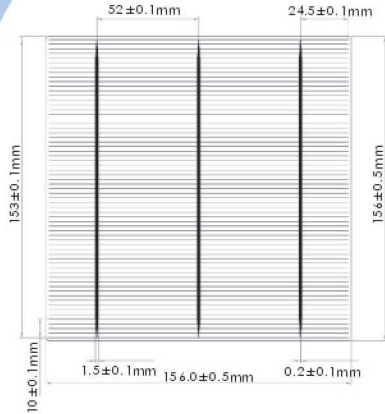

External dimensions

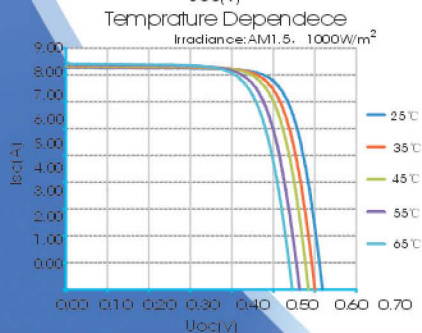

Characteristic curves

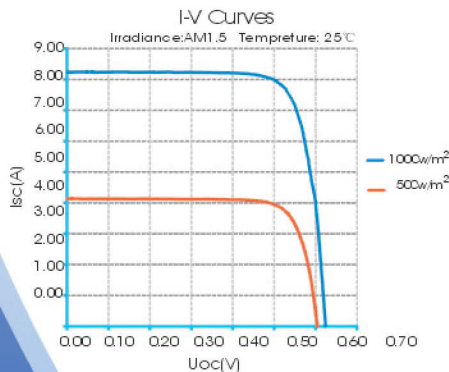

Electrical Characteristic

CLSP156(3BB)	Eff.(%)	Pmpp(W)	Ump(V)	Imp(A)	Uoc(V)	Isc(A)	Vap(V)	Iap(A)
AE175	17.4-17.6	4.26	0.532	8.01	0.631	8.54	0.5	8.30
AE173	17.2-17.4	4.21	0.529	7.96	0.629	8.48	0.5	8.23
AE171	17.0-17.2	4.16	0.525	7.92	0.626	8.42	0.5	8.17
AE169	16.8-17.0	4.11	0.522	7.88	0.623	8.38	0.5	8.10
AE167	16.6-16.8	4.06	0.518	7.84	0.621	8.33	0.5	8.03
AE165	16.4-16.6	4.02	0.516	7.79	0.619	8.27	0.5	7.96
AE163	16.2-16.4	3.97	0.514	7.72	0.617	8.22	0.5	7.89
AE161	16.0-16.2	3.92	0.512	7.66	0.614	8.17	0.5	7.81

This data represents the performance of typical products, and is based on measurements made in accordance with IEC904-1 corrected to STC (Light intensity : Standard intensity 1000W/m², Temperature : 25°C, Spectrum: AM1.5 spectrum)

Mechanical Characteristics

Format	156mm×156mm+/-0.5mm
Average Thickness	200 μm +/-40 μm
Front	Textured silicon Blue Silicon Nitride Antireflective Coating
Back	Full surface aluminum back-surface field 3mm wide silver soldering pads

Temperature Coefficients

Current temperature coefficient	+ 3.3 mA/K
Voltage temperature coefficient	- 2.0 mV/K
Power temperature coefficient	- 0.4 %/K



CHINALIGHT SOLAR

CLSPI56 (3BB)

(Polycrystalline Silicon Solar Cell)



Good energy yield

Excellent isotropic diffuse reflection with mix acid etch surface

Silicon nitrate antireflection coatings deposited using plasma-enhanced chemical vapor deposition



Well electric contact

Both front and back use silver contact

Back surface field is aluminum



High quality

Long-term electrical stability

Narrow performance tolerances

Excellent low light behavior

PID free




Strictly quality testing

Automatism testing and 24 separate bins base on IEC60904 criterion

100% strictly final testing for countercurrent, shunt and series resistance

100% inspection for visual and optical defects

Calibration by Fraunhofer ISE

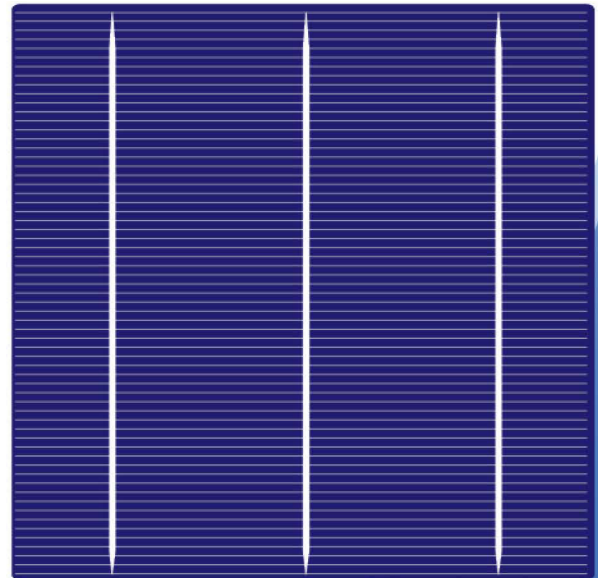

Chinalight Solar Co., Ltd.

Chinalight Haoyu PV Technology(Beijing)Co.,Ltd.

Tel: +86-10-81506588

Fax: +86-10-81506120

Web: www.chinalightsolar.com

E-Mail: sales@chinalightsolar.com

Office in Germany

Tel: +49-40-240908

E-mail: info@chinalight-solar.com

Web: www.chinalight-solar.com

Office in Italy

Tel: +39-02-8392270

E-mail: info@generetitalia.it

Web: www.temaitalia.it