



宁波贝达新能源科技有限公司

**NINGBO BEIDA NEW ENERGY SCIENCE & TECHNOLOGY CO., LTD.**

Add: Beida Industrial park, Lixie, Hengxi Town, Yinzhou District, Zhejiang, China

TEL: +86 574 28810666 FAX: +86 574 28870066

Email: sales@beida-solar.com Website: www.beida-solar.com

---

## BD MODULE


BD50-36M 50W

### EFFICIENCY

- Low voltage-temperature coefficient allows higher power output at high-temperature condition
- High efficient, high reliable solar cells ensure our product output stability

### MATERIALS

- Advanced EVA encapsulation system with reiple-layer back sheet meets the most stringent safety requirements for high-voltage operation
- The sturdy, anodized aluminum frame allows the modules to be mounted on a variety of standard racking systems and to withstand harshest conditions
- Ultra reliable bypass diodes prevent damage through overheating due to shaded or defective cells
- Innovative, environmentally friendly packing method using pile-edges ensures modules arrive in perfect condition
- New frame design incorporation ellipse shaped drainage holes, with more grounding holes, provide flexible installation and use

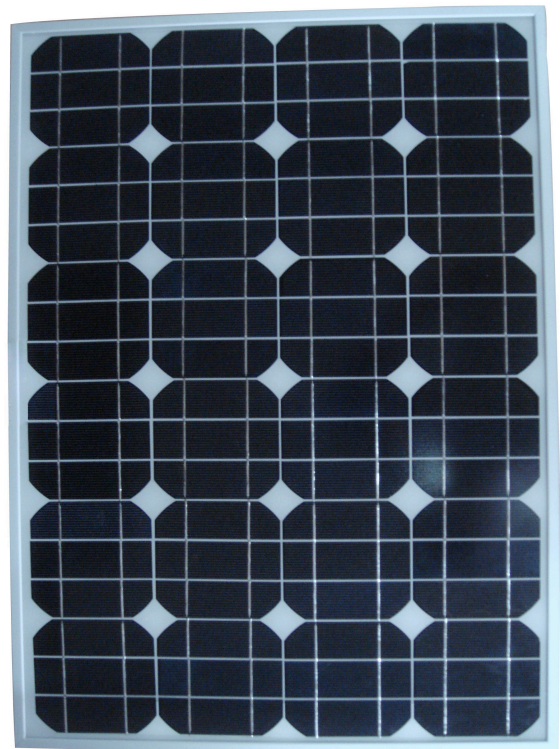

### BENEFITS

- Manufactured in an ISO9001:2000 certified plant
- High efficiency, high safety, high reliability
- Output power tolerance of +/-3%
- 25-year limited warranty on power output, 5-year limited warranty on materials and workmanship

# SPECIFICATIONS

Model Type	BD50-36M
Peak power	50W
Cell type	Mono Crystalline Silicon, 125mm×125mm
Number of cells	36 cells in series
Weight	5.0kg
Dimensions	719×555×35mm
Maximum power voltage(Vmp)	36V
Maximum power current(Imp)	1.39A
Open circuit voltage(Voc)	44.1V
Short circuit current(Isc)	1.43A
Maximum system voltage	DC 700V
Temp.Coeff.of Isc(TK Isc)	0.065 %/°C
Temp.Coeff.of Voc(TK Voc)	- 0.346 %/°C
Temp.Coeff.of Pmax(TK Pmax)	- 0.488 %/°C
Normal Operating Cell Temperature	44.4±2°C

Note: the specifications are obtained under the Standard Test Conditions (STCs):1000W/㎡ solar irradiance, 1.5 Air Mass, and cell temperature of 25°C.

## PHYSICAL CHARACTERISTICS Unit:mm

