



※ Model No. : HS-25W/12V

◆ 제품제원 (Physical specification)



- Solar cells : Mono or Poly (단결정 또는 다결정)
- Front Cover : Low Iron Tempered Glass (3.2mm)
- Back Cover : Tedlar Sheet (0.32mm)
- Dimension : 346 X 612 X 35mm
- Weight : About 3.5kg


◆ 제품성능 (Technical Specification)

(Standard Test Condition (STC) : Irradiance 1KW/m², Spectrum 1.5 Air Mass, Temperature 25℃)

- Peak Power : 25W
- Open Circuit Voltage (Voc) : 21.5V
- Short Circuit Current (Isc) : 1.65A
- Voltage @ peak Power (Vop): 17.6V
- Current @ peak Power (Iop) : 1.45A

*출력허용 오차범위 : ±5%

◆ 도면 (Drawing)

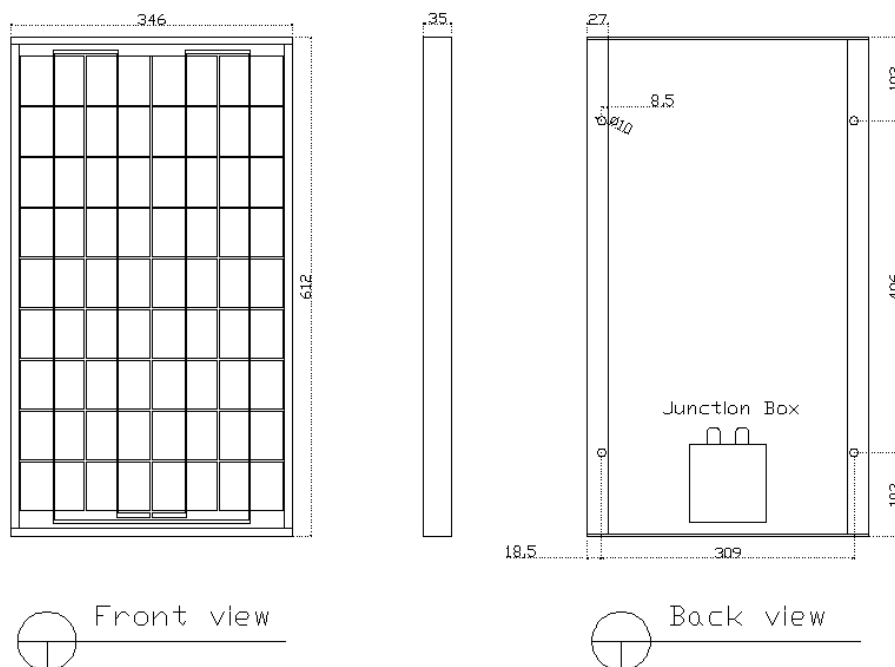

- 본사 : 경기도 고양시 일산서구 대악동 2199, 신동아 노블타워 203호 (411-804)
- 공장 : 충북 충주시 용탄동 1133-4, 충주 1 산업단지 (380-250)
- Office Tel : 031.905.9940 (代), Fax : 031.905.9953
- Factory Tel : 043.853.3600 (代), Fax : 043.853.3617
- E-mail : Info@hssolar.co.kr
- Website : <http://www.solarmodule.co.kr>, <http://www.hssolar.co.kr>
<http://www.solarcells.co.kr>, <http://www.pvmodule.com>