


JST MODULE
JST15M(36) 15W
JST20M(36) 20W
JST25M(36) 25W



High conversion efficiency
High module efficiency to guarantee power output.

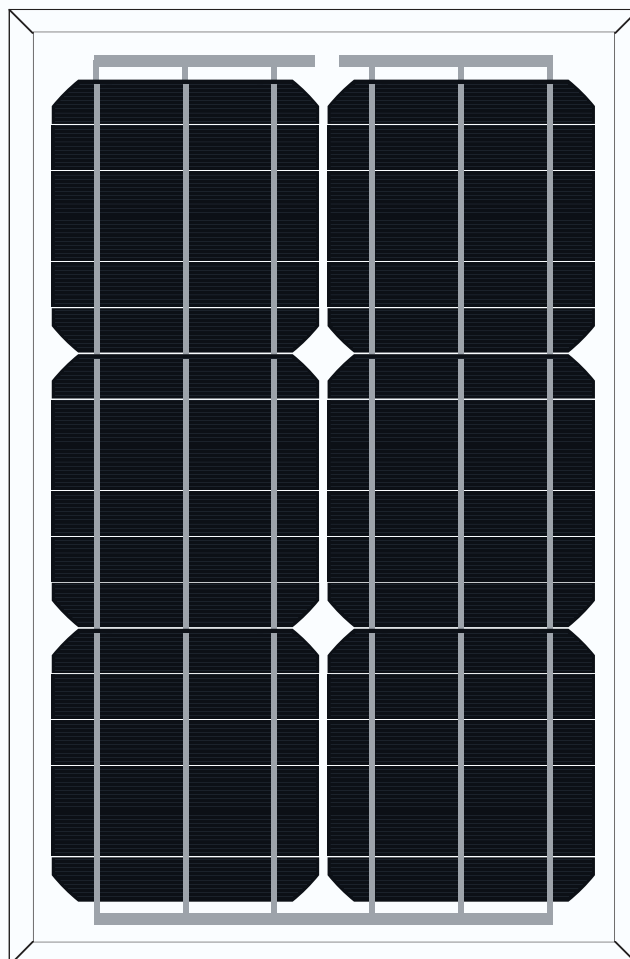

0 to +5W positive tolerance
Detailed information in Electrical Specifications.




Self-cleaning glass
Coating glass for self-cleaning, reduce surface dust.



48-hour response service



Outstanding low irradiation performance
Excellent module efficiency even in the weak light conditions, such as morning or cloudy.

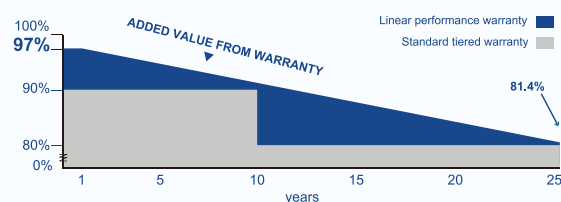

Excellent loading capability
2400Pa wind loads, 5400Pa snow loads.

25

25-year performance warranty

10

10-year warranty on materials and workmanship

IEC 61215 Ed.2
IEC 61730
UL 1703



JST Solar

ELECTRICAL DATA

Model Type	JST15M(36)	JST20M(36)	JST25M(36)
Peak Power (Pmax)	15W	20W	25W
Module Efficiency	8.33%	11.11%	13.88%
Maximum Power Voltage (Vmp)	18.0V	18.1V	18.3V
Maximum Power Current (Imp)	0.83A	1.10A	1.37A
Open Circuit Voltage (Voc) Short	21.8V	21.9V	22.1V
Circuit Current (Isc)	0.97A	1.28A	1.57A
Power Tolerance		0 to +5W	
Maximum System Voltage		1000V	
Nominal Operating Cell		44.4±2°C	
Temperature Maximum Series Fuse		15A	
Rating			

MECHANICAL DATA

Cell Type	156×156mm
Number of Cells	36 (18×2)
Weight	3kg
Dimension	500×360×25mm
Max Load	5400 Pascals
Junction Box	IP67 rated MC4
Connector	Compatible PV
Wire Type	Wire


TEMPERATURE CHARACTERISTICS

Temp. Coeff. of Isc (TK Isc)	0.04% /°C
Temp. Coeff. of Voc (TK Voc)	-0.34% /°C
Temp. Coeff. of Pmax (TK Pmax)	-0.44% /°C

PACKING MANNER


Container	20' GP	40' GP
Pieces per Pallet	26	26
Pieces per Container	2800	5600

PHYSICAL CHARACTERISTICS

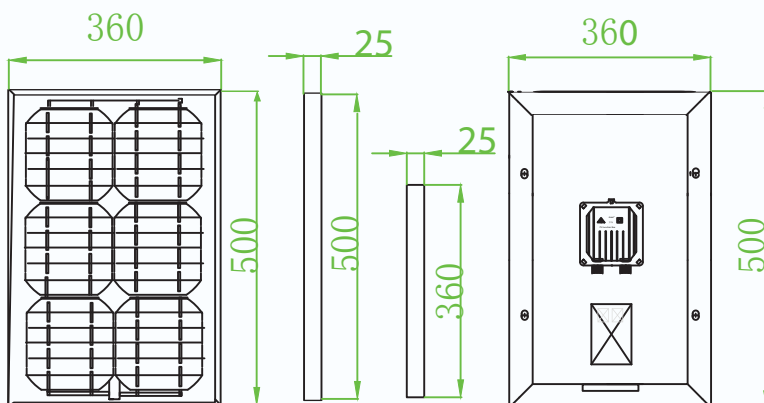


ELECTRICAL CHARACTERISTICS (Take JST200M for example)


Current-Voltage & Power-Voltage Curve
(AM1.5, Cell Temperature 25°C)

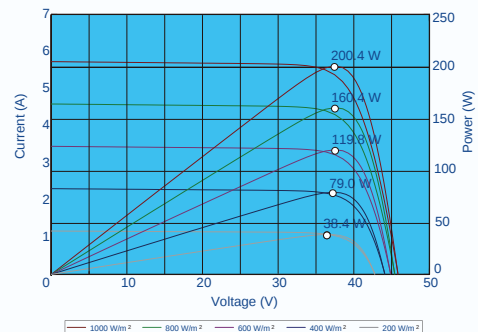

Temperature Dependence of Isc, Voc and Pmax



Irradiance Dependence of Isc, Voc and Pmax
(Cell Temperature: 25°C)



Note: the specifications are obtained under the Standard Test Conditions (STCs): 1000W/m² solar irradiance, 1.5 Air Mass, and cell temperature of 25°C. The NOCT is obtained under the Test Conditions: 800W/m², 20°C ambient temperature, 1m/s wind speed, AM 1.5 spectrum.

Please contact support@jusolar.com for technical support. The actual transactions will be subject to the contracts. This parameters is for reference only and it is not a part of the contracts. The specifications are subject to change without prior notice.