



Play it safe



Premium Modules  
MADE IN GERMANY

Illustration only

## Premium L poly black Premium incell L poly black

245 W ▪ 250 W ▪ 255 W ▪ 260 W

- Homogeneous appearance for aesthetically demanding projects
- Plus-sorted
- Guaranteed high yields for decades
- Premium L: Improved innoframe stability  
Premium incell L: For roof-integrated systems – with patented SOLRIF® frame



# Premium L poly black / Premium incell L poly black

Electrical data under STC (Standard Test Conditions: 1000 W/m<sup>2</sup>, 25 °C, AM 1.5)

Rated power	$P_{max}$	245 W	250 W	255 W	260 W
Sorting limits of performance		-0/+5 W	-0/+5 W	-0/+5 W	-0/+5 W
Voltage	$U_{MPP}$	29.65 V	30.15 V	30.57 V	31.00 V
Open circuit voltage	$U_{OC}$	36.67 V	37.21 V	37.75 V	38.29 V
Current	$I_{MPP}$	8.26 A	8.30 A	8.34 A	8.39 A
Short-circuit current	$I_{SC}$	8.45 A	8.62 A	8.79 A	8.96 A
Efficiency	<b>Premium L poly black</b> <b>Premium incell L poly black</b>	14.7 % 14.6 %	15.0 % 14.9 %	15.3 % 15.2 %	15.6 % 15.5 %

Electrical data at 800 W/m<sup>2</sup>, NOCT (45°C +/- 2K), AM 1.5

Power in MPP	$P_{max}$	185 W	189 W	193 W	196 W
Voltage	$U_{MPP}$	27.74 V	28.21 V	28.60 V	29.01 V
Open circuit voltage	$U_{OC}$	33.73 V	34.23 V	34.73 V	35.22 V
Current	$I_{MPP}$	6.67 A	6.70 A	6.73 A	6.77 A
Short-circuit current	$I_{SC}$	6.82 A	6.96 A	7.10 A	7.23 A

The efficiency decreases by approximately 3% compared to the efficiency under STC at an irradiation of 200 W/m<sup>2</sup> and 25 °C.

## Temperature data

Power temperature coefficient	$T_K(P_{MPP})$	-0.43 %/K
Voltage temperature coefficient	$T_K(U_{OC})$	-0.32 %/K
Current temperature coefficient	$T_K(I_{SC})$	0.04 %/K

## Further information

Number of cells	60
Max. system voltage	1000 V
Reverse current loading capability	17 A
Front cover	Special hardened low-iron glass with anti-reflex coating; Glare reduced to a minimum
Module connection	Junction box 3 bypass diodes IP 67 no potting, 2 x approx. 1 m solar cable Ø 4 mm <sup>2</sup> , plug connector PV4 IP 68
Snow load*	<b>Premium L poly black</b> <b>Premium incell L poly black</b> innoframe framed: 5400 Pa $\hat{=}$ 550 kg/m <sup>2</sup> With SOLRIF®: 5400 Pa $\hat{=}$ 550 kg/m <sup>2</sup>

12-year product warranty, 25-year linear performance warranty according to our additional warranty conditions for solar power modules of the "Premium" product series, which we will gladly send you

Subject to technical modifications with corresponding follow-up certifications. Errors excepted.


\*Load tested according to EN IEC 61215 (ed. 2) in compliance with the installation and operating manual.

\*\*SOLRIF® in-roof mounting system: The manufacturer of this system, Ernst Schweizer AG, Hedingen, Switzerland, gives Solar-Fabrik a guarantee of 10 years on the delivered material and the parts of the system, in accordance with the guarantee terms of Schweizer, which we will gladly provide if requested. Guarantee claims will be processed for you by Solar-Fabrik. This guarantee warranted by Ernst Schweizer AG does not include the solar modules and does not affect the contractual warranty of Solar-Fabrik. by Ernst Schweizer AG does not include the solar modules and does not affect the contractual warranty of Solar-Fabrik.

## Certifications

EN IEC 61215 (ed. 2)<sup>1</sup>  
EN IEC 61730-1, -2<sup>1</sup>  
EN 13501-1, class E  
Protection class II  
Directive 2006/95/EG (CE)  
CSTB for Premium incell system  
Hail protection class 3

<sup>1</sup>Subject to follow-up certifications.

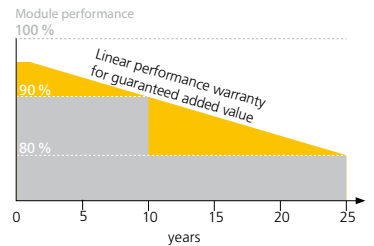

■ Linear performance warranty  
■ Standard tiered warranty

**Premium L poly black**  
Weight:  
approx. 18,5 kg

**Premium incell L poly black**  
Weight:  
approx. 22 kg

Installation dimensions

**Note:** Ensure correct polarity!

Your specialist dealer:

**Solar-Fabrik AG**  
Munzinger Str. 10  
79111 Freiburg  
Germany  
Phone +49 (0)761 4000-0  
Fax +49 (0)761 4000-199  
info@solar-fabrik.de  
[www.solar-fabrik.de](http://www.solar-fabrik.de)