

Play it safe



**Next
Generation**

Premium Modules
MADE IN GERMANY

Premium L mono black Premium incell L mono black

250 W • 255 W • 260 W • 265 W

- Plus-sorted
- Elegant black module for aesthetically demanding projects
- Guaranteed high yields for decades
- Premium L: Improved innoframe stability
Premium incell L: For roof-integrated systems – with patented SOLRIF® frame



Premium L mono black / Premium incell L mono black

Electrical data under STC (Standard Test Conditions: 1000 W/m², 25 °C, AM 1.5)

| Rated power | P _{max} | 250 W | 255 W | 260 W | 265 W |
|-------------------------------|-----------------------------|---------|---------|---------|---------|
| Sorting limits of performance | | 0/+5 W | 0/+5 W | 0/+5 W | 0/+5 W |
| Voltage | U _{MPP} | 30.50 V | 30.95 V | 31.05 V | 31.40 V |
| Open circuit voltage | U _{OC} | 37.80 V | 38.00 V | 38.30 V | 38.50 V |
| Current | I _{MPP} | 8.20 A | 8.25 A | 8.40 A | 8.45 A |
| Short-circuit current | I _{SC} | 8.75 A | 8.80 A | 8.82 A | 8.85 A |
| Efficiency | Premium L mono black | 15.0 % | 15.3 % | 15.6 % | 15.9 % |
| | Premium incell L mono black | 14.9 % | 15.2 % | 15.5 % | 15.8 % |

Electrical data at 800 W/m², NOCT (47°C +/- 2K), AM 1.5

| Power in MPP | P _{max} | 189 W | 193 W | 197 W | 200 W |
|-----------------------|------------------|---------|---------|---------|---------|
| Voltage | U _{MPP} | 28.55 V | 28.97 V | 29.07 V | 29.39 V |
| Open circuit voltage | U _{OC} | 34.73 V | 34.91 V | 34.91 V | 35.37 V |
| Current | I _{MPP} | 6.62 A | 6.66 A | 6.78 A | 6.82 A |
| Short-circuit current | I _{SC} | 7.06 A | 7.10 A | 7.11 A | 7.14 A |

The efficiency decreases by approximately 3% compared to the efficiency under STC at an irradiation of 200 W/m² and 25 °C.

Temperature data

| | | |
|---------------------------------|------------------------------------|-----------|
| Power temperature coefficient | T _K (P _{MPP}) | -0.47 %/K |
| Voltage temperature coefficient | T _K (U _{OC}) | -0.33 %/K |
| Current temperature coefficient | T _K (I _{SC}) | 0.03 %/K |

Further information

| | | |
|------------------------------------|---|---|
| Number of cells | 60 | |
| Max. system voltage | 1000 V | |
| Reverse current loading capability | 17 A | |
| Front cover | Special hardened low-iron glass with anti-reflex coating; Glare reduced to a minimum | |
| Module connection | Junction box 3 bypass diodes IP 67 no potting, 2 x approx. 1 m solar cable Ø 4 mm ² , plug connector PV4 IP 68 | |
| Snow load* | Premium L mono black | innoframe framed: 5400 Pa ≙ 550 kg/m ² |
| | Premium incell L mono black | With SOLRIF®: 5400 Pa ≙ 550 kg/m ² |

12-year product warranty, 25-year linear performance warranty according to our additional warranty conditions for solar power modules of the "Premium" product series, which we will gladly send you

Subject to technical modifications with corresponding follow-up certifications. Errors excepted.



* Load tested according to EN IEC 61215 (ed. 2) In compliance with the installation and operating manual.

** SOLRIF® in-roof mounting system, TÜVdotCom certified. The manufacturer of this system, Ernst Schweizer AG, Hedingen, Switzerland, gives Solar-Fabrik a guarantee of 10 years on the delivered material and the parts of the system, in accordance with the guarantee terms of Schweizer, which we will gladly provide if requested. Guarantee claims will be processed for you by Solar-Fabrik. This guarantee warranted by Ernst Schweizer AG does not include the solar modules and does not affect the contractual warranty of Solar-Fabrik. by Ernst Schweizer AG does not include the solar modules and does not affect the contractual warranty of Solar-Fabrik.



Certifications

EN IEC 61215 (ed. 2)¹
 EN IEC 61730-1, -2¹
 EN 13501-1, class E
 Protection class II
 Directive 2006/95/EG (CE)
 MCS
 TÜVdotCOM (Solrif® frame)**
 Hail protection class 3



¹Subject to follow-up certifications.

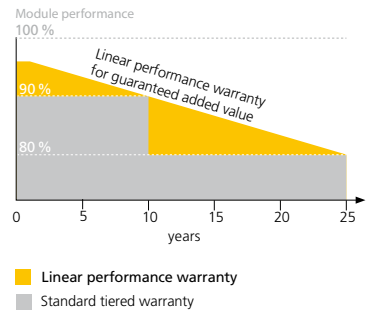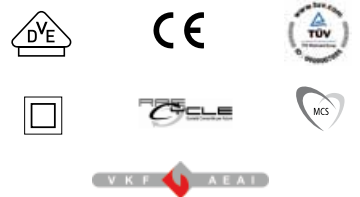

Premium L
 mono black
 Weight:
 approx. 18.5 kg



Premium incell L
 mono black
 Weight:
 approx. 22 kg



Note: Ensure correct polarity!

Your specialist dealer:

Solar-Fabrik AG
 Munzinger Str. 10
 79111 Freiburg
 Germany
 Phone +49 (0)761 4000-0
 Fax +49 (0)761 4000-199
 info@solar-fabrik.de
www.solar-fabrik.de