



Solar Photovoltaic Modules

NEASE Solar Photovoltaic Module Specification Data

Module Type	12V/30WP	12V/35WP
Max. Power	30WP	35WP
Cell Type	Poly/Mono Crystalline Silicon Solar Cells	
No. Of Cell	36 Cell	
Max. System Voltage	1000V	
Power Tolerance	± 3%.	
Surface Maximum Load Capacity	60m/s(200kg/sq.m)	
Weight	3.9 kg	
Glass Dimensions	455 mm X 670mm X 3.2 mm	
Electrical Characteristic		
Open Circuit Voltage(Voc)	21.5 V	21.5V
Short Circuit Current(isc)	1.93 A	2.20A
Max. Power Voltage(Vmax)	17.5 V	17.5V
Max. Power Current(imax)	1.78A	2.08A
Temp Coefficiencies Of Isc(%)	20μA/°C/Cell area/C_P	
Temp Coefficiencies Of Voc(%)	-2.2mv/°C/C_S	
Temp Coefficiencies Of Pm (%)	-0.44%/°C	
Cell Efficiency (%)	>15%	
Module Efficiency(%)	>9.5%	>11%
Operating Temperature	-40 to +85°C	



Features and Benefits

- ❖ Cells are laminated with EVA, TPT and tempered glass ensuring long life and the most stringent safety requirements For High voltage operation.
- ❖ Anodized aluminum frame with convenient mounting slots.
- ❖ Nominal 6VDC/ 12V DC / 20V / 24V DC for standard output.
- ❖ We are specialized in 18, 36, 54, 60, 72 cells solar modules.
- ❖ We are specialized in making black and transparent back-sheet solar module as well.
- ❖ Withstand high wind pressure and snow load.
- ❖ Output power tolerance of ± 3%.
- ❖ High efficiency solar cells.



*Conditions:(STC):Irradiance:1000W/m²,spectral distribution AM1.5,Cell temperature:25°C

Module Dimensions

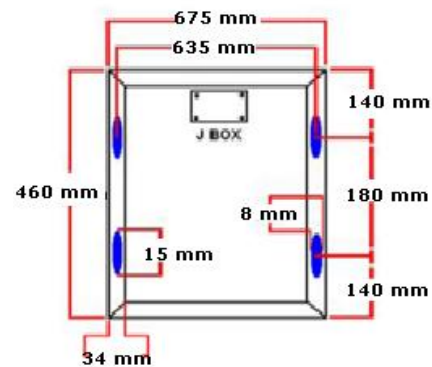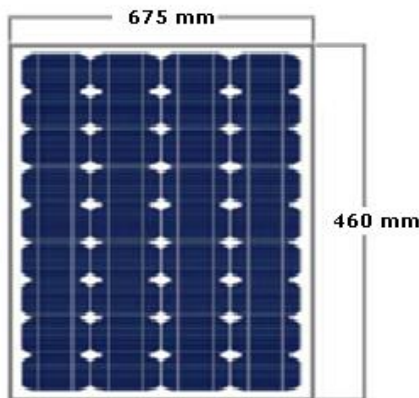

Certification



MNRE
Channel
Partner



*** NEASE reserves the right to amend the above specification without prior notice.**

NEETY EURO-ASIA SOLAR ENERGY

B/4/1 GIDC Electronics Estate Sector - 25 Gandhinagar - 382024 Gujarat , India

Tel : +91-79-23287395,23287396 Fax : +91-79-23287394

Email: sales@nease.in & info@nease.in

Web Site: www.nease.in