


# Technical Description



## Photovoltaic Module NG 145 TP3 SAW

Product Code: N00986

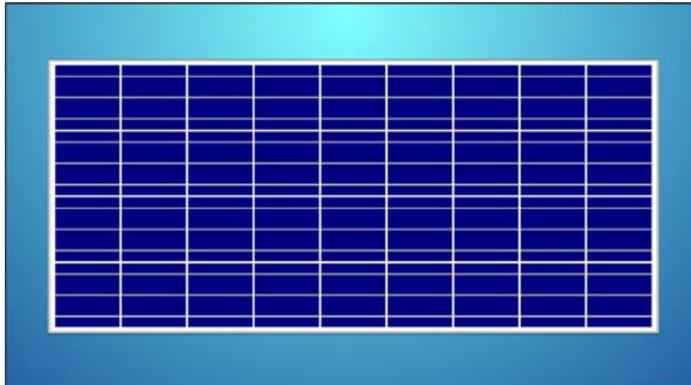

**36 polycrystalline Si solar cells**

**Main application: general off-grid PV systems**

### Module Electrical Performance under Standard Test Conditions

*Refers to standard test conditions of 1000 Wm<sup>-2</sup> solar irradiance, 25°C cell temperature, Air Mass 1.5.*

*Note: Maximum power point is subject to +/-5% variation. All other values are typical and for guidance only.*

Maximum Power Point: 145 Watts, 8.08 Amps at 17.9 Volts.

Short Circuit: 8.59 Amps. Open circuit: 22.4 Volts.

### Dimensions and Weight

*all dimensions +/- 2mm, weight approximately +/-0.3kg*

Length: 1480mm. Width: 670mm. Thickness at edge: 34mm. Weight: 10.5kg

### Construction

Top cover material: low iron tempered S glass 3.2mm

Rear cover material: white polyamide x3

Encapsulant (lamination material): EVA

Frame: anodised aluminium

2 factory-fitted bypass diodes

1 junction box type S1410-2

2 x 4mm earthing holes in frame

### Integral mounting holes

Along length: 740/1438mm centre to centre, 370/21mm centre to module edge.

8 holes, size 7mm.

Across width: 628/334mm centre to centre, 21/168mm centre to module edge.

### Cell circuit

Cell dimensions: Length (tab direction) 156mm. Width: 156mm.

Electrical circuit: 36 cells in series

Cell layout: 4 rows, each row is 9 cells long.

### Normal Operating Cell Temperature (NOCT)

47°C

*error in measurement around +/- 2°C*

*Cell temperature at 800Wm<sup>-2</sup> solar irradiance, 20°C ambient temperature, wind speed <=1ms<sup>-1</sup>, free air access to rear.*

### Efficiencies based on Standard Test Conditions Rating

Module: 14.6%

Laminated area: 14.8%

Cells alone: 16.6%

*Note: Standard Test Conditions efficiency figures should only be used to compare one module with another. These efficiency figures do not apply to actual field performance, for which a careful analysis of operating conditions is necessary to determine the effects of module temperature and other factors.*

*Specifications may change due to Naps policy of continuous product improvement.*

Copyright © Naps Systems Oy 2013

*Please check current specification before purchasing.*

*Information last updated:*

*31-Jan-13*

**Naps Systems Oy, Ruosilankuja 7A, FI-00390 Helsinki, Finland**

**Tel +358 20 7545 666, Fax +358 20 7545 660, [www.napssystem.com](http://www.napssystem.com) [sales@napssystem.com](mailto:sales@napssystem.com)**