



Panel Monocrystalline 260W** Natural color

** Available from April 2013

QUALITY CERTIFICATES AND GUARANTEES: IEC61215, CE, IEC 61730.
10-year guarantee for the module's structure, 90% production guarantee after 10 years, 80% production guarantee after 25 years.

Electrical characteristics

Model	MONO 260 W NATURAL COLOR	
Référence	DS6M260	
Pmax (Power)*	260W	
Vmpp (nominal voltage)	31,0 V	
Impp (nominal current)	8,39 A	
Voc (voltage open circuit)	37,8 V	
Isc (short-circuit current)	9,08 A	
Maximum voltage	1000 V	
Cell yield	18,30 %	
Panel yield	16,00 %	
Power tolerance	0 + 3 %	
Thermal coefficients	Voc	- 0,34 % / °C
	Isc	+0,05 % / °C
	Pmax	-0,45 % / °C
NOCT	46 °C +/- 2°C	
Operating temperature	-40°C / 85°C	

*STC: Irradiation 1000 W/m², AM 1.5, Temperature 25°C

Physical characteristics

Cell	Silicon monocrystalline	
Dimensions	6" (156 x 156 mm)	
Quantity / arrangement	60 (6 x 10)	
Chassis	Aluminium	
Case / by-pass diodes	IP65 / 3	
Cables / connector	4 mm ² / MC4	
Dimensions (l x h x p) en mm	1640 x 992 x 46 mm	
Weight	20 kg	
Length of cable	1000 mm	


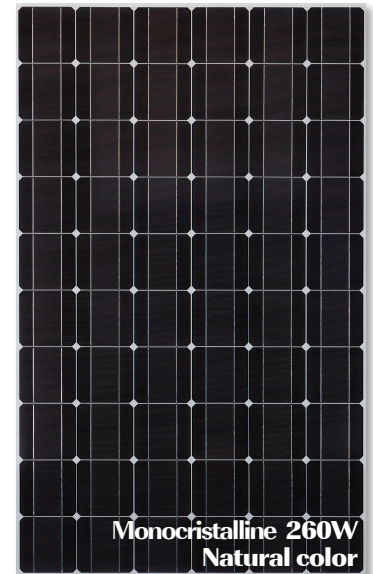


Photo no contractual

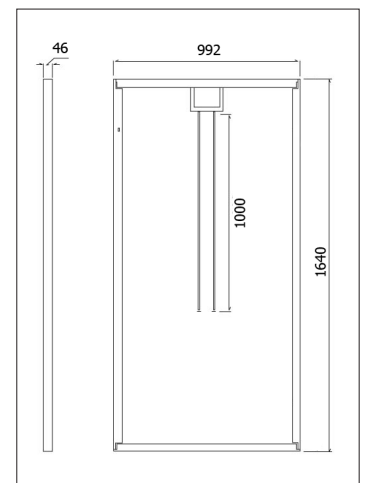

255 W Monocrystalline DS SOLAR