



30 WATT SOLAR PANEL

Features:

- Extra heavy gauge aluminum frame, designed for ease of mounting and durability
- Industry leading quality, manufactured with advanced encapsulation process
- 36 Highly efficient polycrystalline modules
- Engineered for off-grid applications with conversion efficiency >14%
- Junction box is rain tight and has four 1/2" conduit or cable fitting knock-outs

Electrical Specifications:	OGRE P030-J12
Max Power	30 Watts
Max Power Voltage	17.6 Vmp
Max Power Current	1.72 Imp
Open Circuit Voltage	21.7 Voc
Short Circuit Current	1.85 Isc
Maximum System Voltage	70 V
Series Fuse Rating	5A
Temperature Co-Efficients	
Power	-0.47%/K
Voltage	-0.351%/K
Current	+0.035%/K
Cell Efficiency	14.30%
Number of Cells in Series	36
Cell Type	Poly
Number of Strings in Parallel	1
Max Power Tolerance	+/- 5%

Mechanical Characteristics:	
Weight	7.7 lbs
Dimension	31.9x13.8 in.
Thickness, including junction box	2.13 in.
Frame-aluminum	>10µm anodized

25 Year Limited Warranty*


- 80% power output
- 10-year limited warranty of 90% power output
- 5-year limited warranty of materials and workmanship

*Refer to OGRE's warranty document for terms and conditions



Certifications

- *FM Approvals:*
 - Class 1, Division 2
 - Groups A, B, C, D
 - Hazardous Locations Type IP65, T5 @ Ta = -40°C to +90°C
- Manufactured in ISO 9001 certified factory

30 WATT SOLAR PANEL

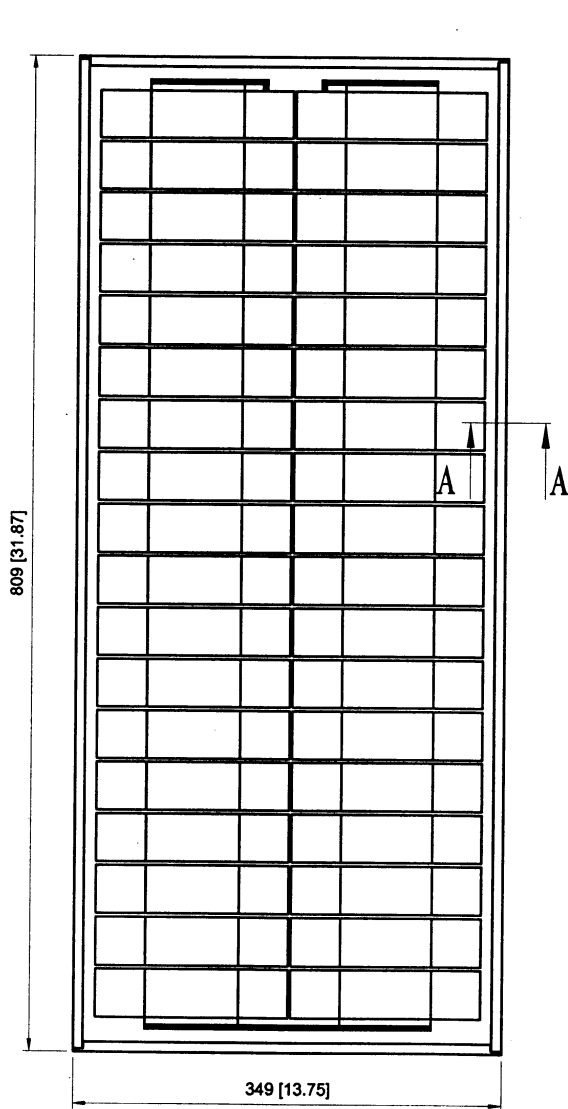

Junction Box

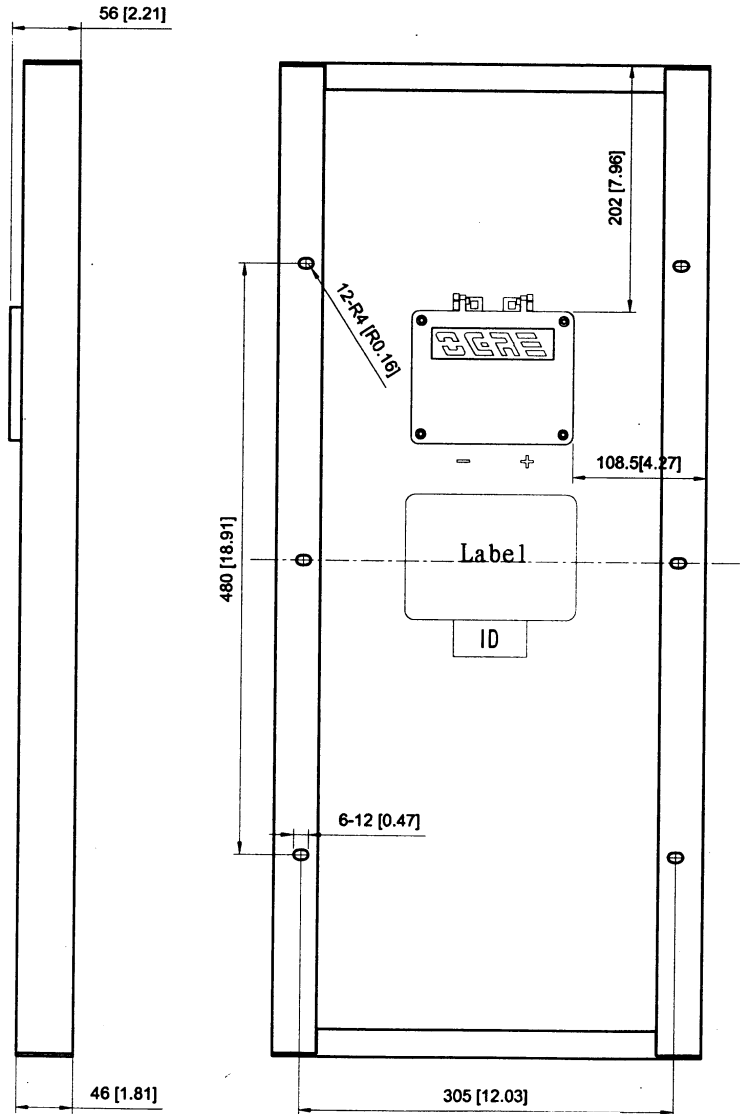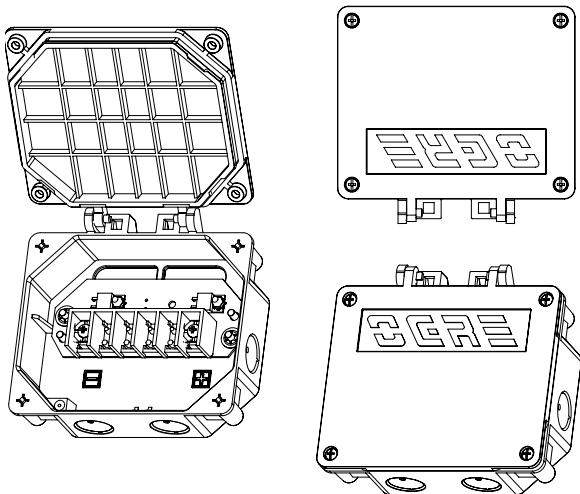

Cross Section

