



# Naps Saana 245-255 TP3 MBW

Naps Systems' 30 years of solar power experience in all continents and conditions provide the highest level of quality and power in an attractive and dependable package.

## High power and efficiency

Naps Saana series of solar modules contain 60 high efficiency polycrystalline solar cells. The cells are carefully selected to assure a narrow and positive power range, thus minimising mismatch losses in the system.

The high transmission structured glass has a light texture on the front and a deeper texture inside, which improves the adhesion of the EVA encapsulant. This combination of textures also gives improvement to the performance of the solar module compared to smooth glass.

## Dependable construction and long life

Featuring the highest standards of construction and materials, Naps Saana solar modules are able to withstand the harshest environments and continue to perform efficiently. Properly installed, these modules have a design life well beyond the power warranty. Limited power warranties are given for both 10 and 25 years. The modules are tested to meet or exceed all relevant international standards and the highest requirements for quality and performance.



Glass type:

Frame colour:

Backsheet colour:

MATT

BLACK

WHITE

- Carefully selected polycrystalline silicon solar cells for close tolerance
- Solar cells treated for reduced reflection and for efficient conversion of both direct and diffuse light
- Electrical circuit laminated between layers of ethylene vinyl acetate (EVA) for electrical isolation, moisture resistance and UV stability
- Low iron content, tempered glass for mechanical protection and high light transmission
- The light textured surface of the matt glass improves the performance of the module
- The deep texture inside of the glass improves the adhesion of the EVA encapsulant
- Multi-layered polymer backsheet for resistance to abrasion, tears and punctures and dependable electrical insulation
- Rugged and lightweight anodised aluminium frame with mounting, grounding and drainage holes
- Junction box with pre-fitted cables and quick connectors designed for ease and safety
- Wired-in bypass diodes to reduce potential loss of power and damage from partial array shading
- Tested for a wide range of operating conditions (-40°C to +85°C)
- Tested to withstand the highest wind, hail storm and snow load requirements (5400 N/m<sup>2</sup>)
- Designed to meet or exceed the environmental requirements of IEC61215
- Designed to meet the requirements of IEC61730, including Safety Class II to IEC61140

**NAPS**   
Power of Light



- Maximum power (W/Pmax)
- Maximum power tolerance (W)
- Current (typical at max power) (A/Ip)
- Voltage (typical at max power) (V/Vp)
- Short circuit current (typical) (A/Isc)
- Open circuit voltage (typical) (V/Voc)
- Module efficiency (minimum) (%)
- Module efficiency (maximum) (%)

Maximum power (W/Pmax)  
Current (typical at max power) (A/Ip)  
Voltage (typical at max power) (V/Vp)  
Short circuit current (typical) (A/Isc)  
Open circuit voltage (typical) (V/Voc)

245 TP3 MBW	250 TP3 MBW	255 TP3 MBW
245	250	255
+5/-0	+5/-0	+5/-0
8.13	8.23	8.33
30.1	30.4	30.6
8.58	8.66	8.74
37.3	37.6	37.9
15.3	15.6	15.9
15.6	15.9	16.2
245 TP3 MBW	250 TP3 MBW	255 TP3 MBW
178.9	182.7	186.6
6.52	6.60	6.68
27.4	27.7	27.9
6.96	7.02	7.09
34.7	34.9	35.2



Overall length (mm).....	1623
Overall width (mm).....	986
Area (m <sup>2</sup> ).....	1.601
Thickness at edge (mm).....	35
Weight (kg).....	21.1

Cell type.....	polycrystalline 3BB
Cells .....	60
Cell dimensions (mm).....	156 x 156
Cell electrical circuit (series x parallel) .....	60 x 1
Cell layout (horizontal x vertical).....	6 x 10
Glass thickness (mm).....	4.0
Junction box type.....	Hercules HBH
Bypass diodes factory fitted.....	3
Cables (4.0 mm <sup>2</sup> ).....	2 x 1 m
Connector type .....	H4C
Other connector options available to special order	

IEC61730 Application Class A, equivalent to Safety Class II

Voltage (V)..... 1000

Series fuse protection rating (A).....	15
Reverse current maximum (A).....	15

Tested to (N/m<sup>2</sup> = Pa) ..... 5400  
According to IEC 61215-2 extended test for heavy snow load


Open circuit voltage (V/K).....	-0.125
Short circuit current (A/K).....	0.00477
Maximum power (%/K).....	-0.42

Reduction (approximately) (%).....	3
Cell temperature (°C).....	25
Irradiance change (W/m²).....	from 1000 to 200
Air Mass.....	1.5


Cell temperature (°C).....	25
Irradiation (W/m <sup>2</sup> ).....	1000
Air Mass.....	1.5

Cell temperature (°C).....	46
Irradiation (W/m <sup>2</sup> ).....	800
Ambient temperature (°C).....	20
Wind speed (m/s).....	≤1
Free air access to module rear	

1 kW/m<sup>2</sup> IRRADIANCE, VARYING CELL TEMPERATURE (°C) (TYPICAL FOR SAANA 245 TP3 MBW)

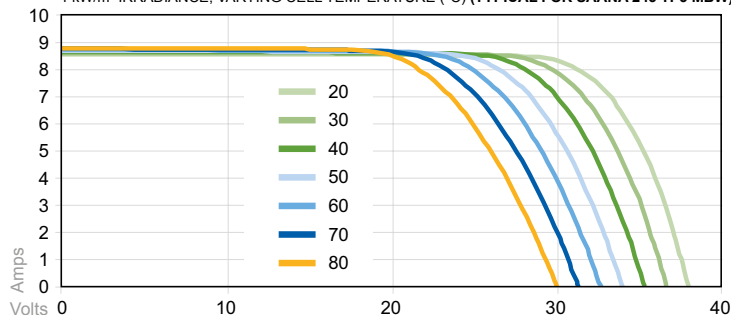

25°C CELL TEMPERATURE, VARYING IRRADIANCE (W/m<sup>2</sup>) (TYPICAL FOR SAANA 245 TP3 MBW)

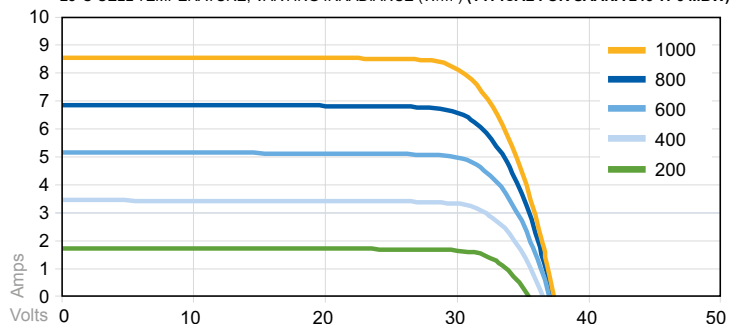

Made in EU



Naps Systems Ltd • Ruosilankuja 4, FI-00390 Helsinki, Finland  
Tel. +358 20 7545 666 • sales@napssystems.com • www.napssystems.com

Specifications may change without notice due to Naps' policy of continuous product development. Please confirm current specification before purchase. All product rights belong exclusively to Naps Systems Ltd.

**NAPS**   
Power of Light