



## MAXIMA GxB 300 SL Bifacial Module

A Trusted Quality Brand in Solar



### High Performance

Bifacial technology generates power from both the front and back faces of the module, resulting in up to 20% higher energy harvest (kWh). Our HCT cells packaged in frameless double glass modules yield higher power and do not suffer from light-induced degradation (LID) or potential induced degradation (PID).



### Quality & Reliability

Double glass modules designed for durability. Certified to international certification body standards: IEC, UL, and CEC listed. Manufactured according to the International Quality Management System ISO9001.



### Extreme Climate Performance

As temperatures rise, our patented SmartSilicon hybrid cell technology produces more power [kW] than conventional crystalline silicon solar panels at the same elevated temperature.



### Guaranteed Performance

All modules have a 10 year product warranty and 25 year power output warranty.



### Superior Aesthetics

Thin profile double-glass construction provides superior aesthetics that are a perfect complement to roofs, carports, and canopies.

### About Sunpreme

Sunpreme is an innovative solar PV module manufacturer headquartered in Sunnyvale, California with manufacturing facilities in the United States and China. We provide high quality, reliable and aesthetically superior modules to residential, commercial, and utility customers globally. Sunpreme solar systems are delivering clean energy on 5 continents.

Sunpreme solar panels are designed and engineered in Silicon Valley, CA, USA.

### SmartSilicon Technology

Sunpreme modules use our patented SmartSilicon Hybrid Cell Technology platform technology that utilize enabling thin-film materials on surface engineered Silicon substrate to achieve high-efficiency power output and reliable energy production for increased project returns.

Unlike conventional silicon or thin-film technologies, Sunpreme uses highly scalable process to deliver high output solar power at very competitive Levelized Cost of Energy (LCOE).

[www.sunpreme.com](http://www.sunpreme.com) | [info@sunpreme.com](mailto:info@sunpreme.com)

Toll Free: +1.866.245.1110

**SL**  
for Super Light  
Thin Glass



Front view



Back View

### High Efficiency

18% Module Efficiency (Mono-facial),  
20% Efficiency with 10% Backside Power Boost, and  
over 21% with 20% Backside Power Boost

### Bifacial Energy Boost

Harvests sun from the backside to increase power output up to 20%

### Double-Glass Frameless Design

Sunpreme Design is more robust, and does not require module grounding

### 10 YEAR


PRODUCT WARRANTY

### 25 YEAR

POWER WARRANTY

Performance warranty obligations on GxB 300 SL module(s), if produced and sold during the Policy Period [July 15th, 2014 to Dec 31st, 2015], have been insured by Sunpreme with a Munich Re Group insurer, reinsured by Munich Reinsurance, a AA- rated reinsurer. Only Sunpreme or designated successor have a direct claim against the insurer.

In head-to-head testing with a leading US manufacturer, Sunpreme's Maxima GxB panel outperforms the competition with over 20% higher power output, exceeding the STC Power rating under real world conditions

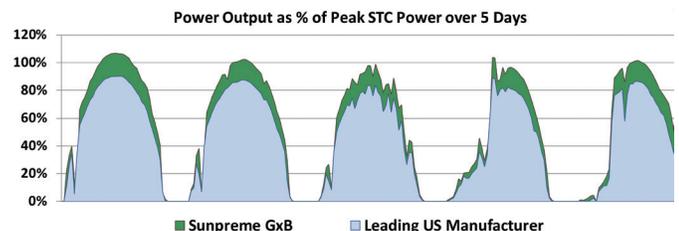

<b>ELECTRICAL SPECIFICATIONS<sup>1</sup></b>	<b>290</b>	<b>300</b>	<b>310</b>
STC rated output P <sub>MPP</sub> (W)	290	300	310
Cell Efficiency	20.7%	21.3%	22.0%
Module Efficiency STC	17.6%	18.2%	19.0%
Standard sorted output	-3%/+5%	-3%/+5%	-3%/+5%
Open Circuit Voltage V <sub>OC</sub> (V)	43.9	44.9	45.1
Short circuit current I <sub>SC</sub> (A)	9.2	9.3	9.3
Rated Voltage V <sub>MPP</sub> (V)	33.7	34.5	35.6
Rated Current I <sub>MPP</sub> (A)	8.6	8.7	8.7

<sup>1</sup>: Standard Test Conditions for front-face of panel: 1000 W/m<sup>2</sup>, 25°C.

### BI-FACIAL OUTPUT<sup>\*</sup>

#### With 10% Backside Power Boost

Power Output (W)	319	330	341
Module Efficiency	19.5%	20.1%	20.8%

#### With 20% Backside Power Boost

Power Output (W)	348	360	372
Module Efficiency	21.2%	22.0%	22.7%

\*Backside boost for flush mount configuration is ≤5%, resulting in I<sub>sc</sub> ≤9.56 - 9.77 A

### TEST OPERATING CONDITIONS

Operating Temperature	- 40 to + 85°C
Storage Temperature	- 40 to + 85°C
Maximum Series Fuse	15 A
Maximum System Voltage	600V UL / 1000VDC IEC
Power/Sq.Ft. w/ 20% backside power boost	20.3 W / Sq. Foot
Maximum load capacity	4,000 Pa (snow load) 150 mph wind rating
Fire Class	Class A - Type 10

### TEMPERATURE COEFFICIENTS

Temperature coefficient P <sub>MPP</sub>	-0.28%/C
Temperature coefficient I <sub>SC</sub>	+0.015%/C
Temperature coefficient V <sub>OC</sub>	-0.21%/C
Normal operating cell temperature (NOCT)°C	46C +/- 2

### WARRANTY

10 year extended product warranty  
95% power warranty first 5 years  
-0.6% or less per year degradation for the following 20 years

### CERTIFICATION

Certified to UL 1703, IEC 61646, IEC 61730-01, IEC 61730-02, IEC 61701 standards, CEC & FSEC listed, and CE mark




### MECHANICAL SPECIFICATIONS

Dimensions	1,663 x 990 x 4.4 mm (5.46 x 3.25 x 0.015 ft)
Weight	18.0 kg (39.68 lbs)
Area	1.64 m <sup>2</sup> (17.7 ft <sup>2</sup> )
Cell type	Bifacial Hybrid Cell Technology (HCT)
Module type	60 Cells, Frameless double glass design, no grounding required
Glass	Strengthened, 2.0mm, anti-reflective coating, low-iron
Junction Box	Tyco IP-67 rated; 1,000V UL/IEC, 3 diodes
Cables	4mm <sup>2</sup> x 0.9 m cable: MC4 or MC4 Compatible Tyco connectors MC4


### PACKAGING

Modules per crate	26
Crates per shipping container	28

### I<sub>max</sub> - V<sub>max</sub> (60 cell Version)

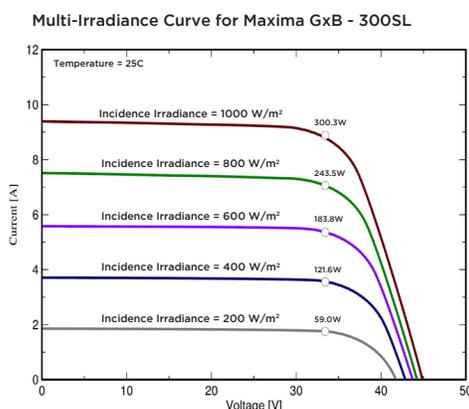


### Rear View (mm)

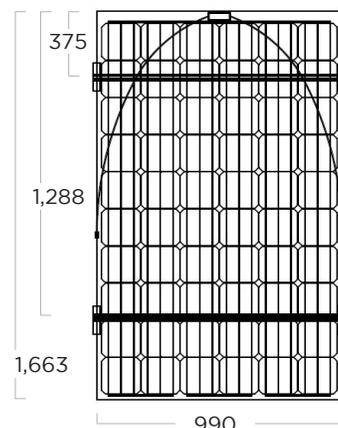

### Mounting method

- Rail structure runs parallel to short-side of module
- Uniform mounting method for ground, roof, or carport installations

### Side View (mm)

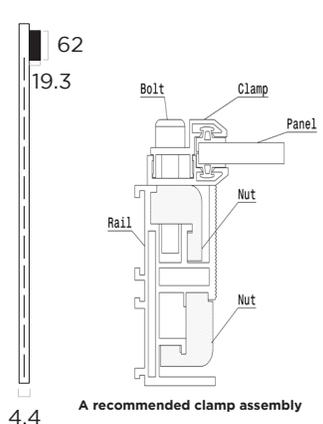

Covered by one or more of the following U.S. patents:  
7,951,640; 7,956,283; 7,960,644