


## Poly-Crystalline

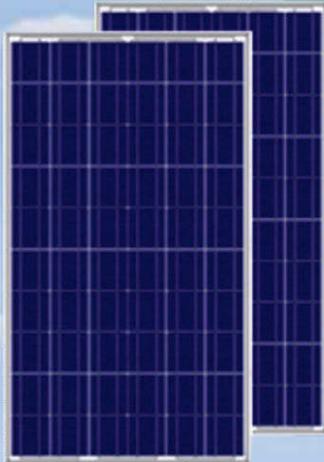

### SALIENT FEATURES

- Range start from 100W – 300W.
- 25 Year warranty.
- All manufactured modules are tested 100% by self.
- Compliance with global standard.
- High efficiency, optimal output.

Nominal Maximum Power (Pmax)	100W	150W	200W	250W	300 w
Optimum Operating Voltage (Vmp)	18	30.6	27	31.32	31.32
Optimum Operating Current (Imp)	5.56	4.9	7.41	7.98	9.75
Open Circuit Voltage (Voc)	21.6	36.6	32.4	37.2	37.8
Short Circuit Current (Isc)	5.92	5.26	8	8.45	10
Cell Arrangement	36 (9X4)	60 (10X6)			
Front Cover (Tempered Glass)	3.2mm				
Encapsulate	EVA				
Back Cover	Composite sheet				
Junction Box	3 terminal			IP-65 PROTECTION.	
Mounting Holes Pitch (Y)-mm	665	630			
Mounting Holes Pitch (X)-mm	643	938			