




250w Polycrystalline Solar Module

- UL & CEC listed, perfect for residential and commercial projects
- Standard 60-cell size, compatible with all major inverters and racking solutions
- Robust anodized aluminum frame, superior encapsulant materials and low-iron tempered glass for long service life and increased efficiency
- Warranty: 10 years workmanship, 12 years 90% output, 25 years 80% output

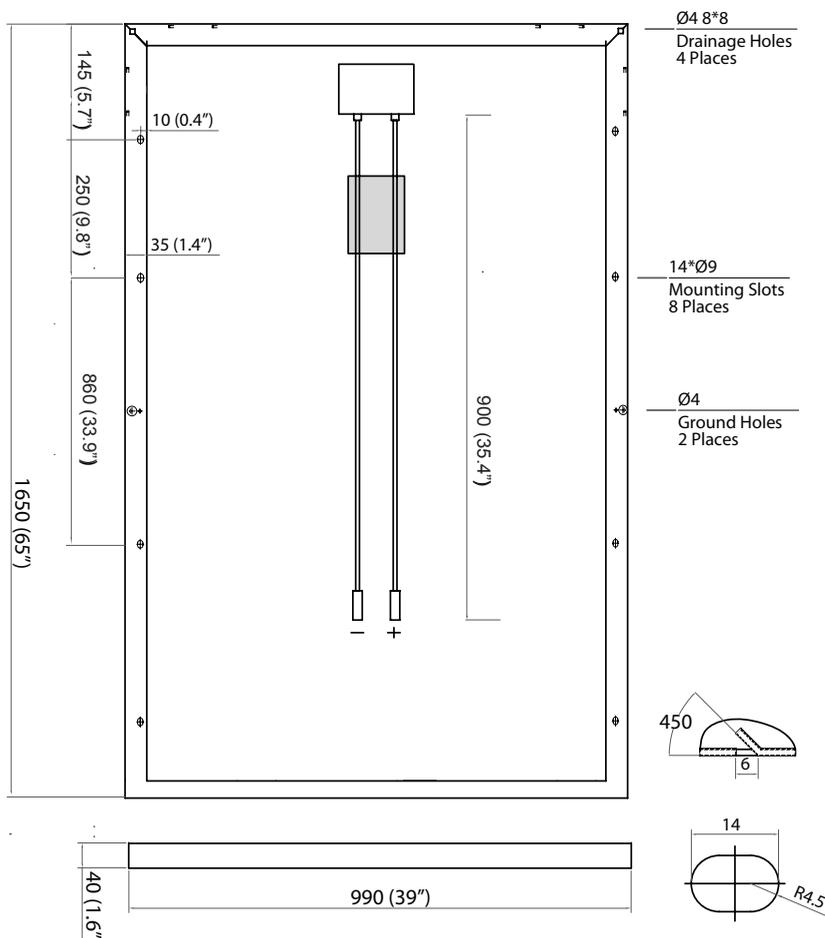

ZBR-250P	
STC Power	250 w
Vmp	30.7 V
Imp	8.14 A
Voc	37.7 V
Isc	8.72 A
Module Efficiency	15.3%
PTC Rating	224.6 w
Max Sys Voltage	600 V
Max Series Fuse	15 A
Tolerance	± 3%
Dimensions	65 x 39 x 1.6 in
Weight	19.5 kg / 43 lbs
Connector Type	MC-4
# cells	60 (6x10)
Temperature Coefficients	
NOCT	48 ± 2°C
Pm	-0.45 %/°C
Voc	-0.35 %/°C
Isc	+0.05 %/°C

info@zebra-energy.com