




# 300w Polycrystalline Solar Module

- UL & CEC listed, great for commercial and utility scale projects
- Standard 72-cell size, compatible with all major inverters and racking solutions
- Robust anodized aluminum frame, superior encapsulant materials and low-iron tempered glass for long service life and increased efficiency
- Warranty: 10 years workmanship, 12 years 90% output, 25 years 80% output

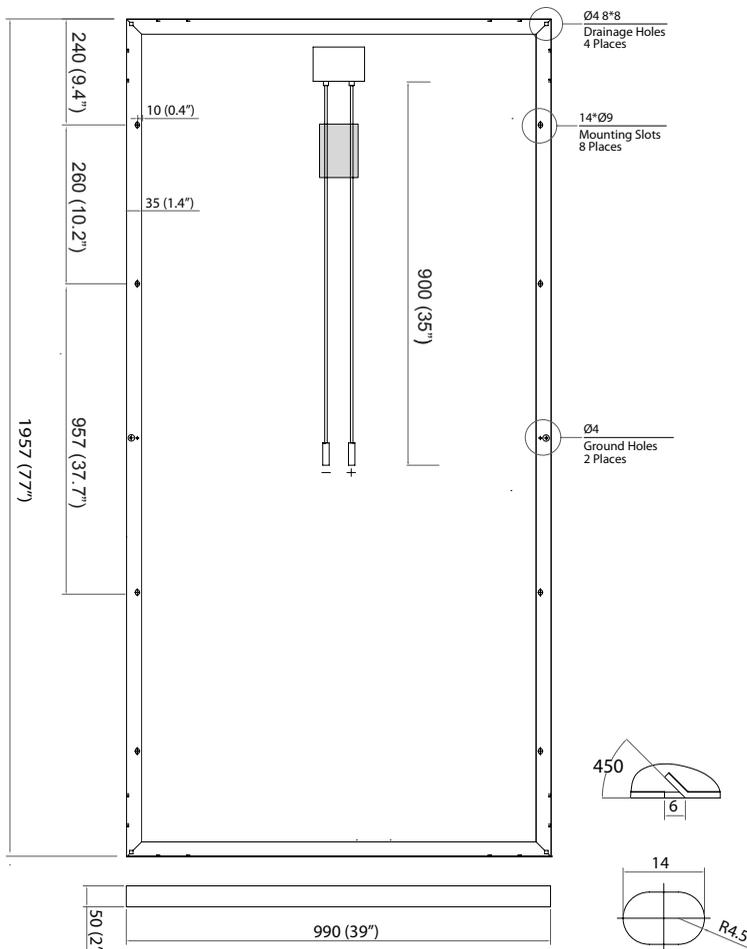

| ZBR-300P                 |                    |
|--------------------------|--------------------|
| STC Power                | 300 w              |
| Vmp                      | 36.2 V             |
| Imp                      | 8.29 A             |
| Voc                      | 44.5 V             |
| Isc                      | 8.90 A             |
| Module Efficiency        | 15.5%              |
| PTC Rating               | 271.6 w            |
| Max Sys Voltage          | 600 V              |
| Max Series Fuse          | 15 A               |
| Tolerance                | ± 3%               |
| Dimensions               | 77 x 39 x 2.0 in   |
| Weight                   | 25.0 kg / 55.6 lbs |
| Connector Type           | MC-4               |
| # cells                  | 72 (6x12)          |
| Temperature Coefficients |                    |
| NOCT                     | 48 ± 2°C           |
| Pm                       | -0.45 %/°C         |
| Voc                      | -0.35 %/°C         |
| Isc                      | +0.05 %/°C         |

info@zebra-energy.com