

40-50 Watt

POLY CRYSTALLINE MODULE 36x(156mmx52mm)




www.risenenergy.com
THE POWER OF RISING VALUE



Electrical Characteristics

Model	Pm(Wp)	Tolerance	Vm(V)	Im(A)	Voc(V)	Isc(A)
SYP40S	40W	+ -3%	17.4	2.31	21.6	2.57
SYP45S	45W	+ -3%	17.8	2.53	21.9	2.73
SYP50S	50W	+ -3%	17.9	2.80	22.1	3.11

Valued at STC (AM 1.5, 1000W/m², 25°C)

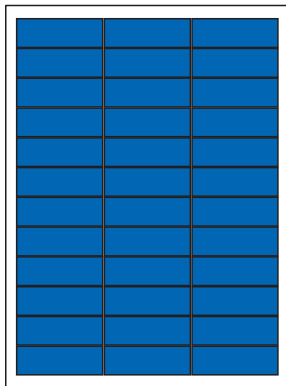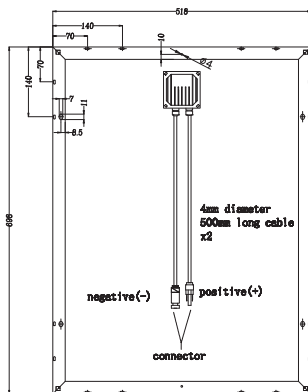

Specifications

- Number of poly crystalline solar cell 36pcsx(156mmX52mm)
- Aluminum frame, dimension 698x518x25mm
- Weight 4.50kg
- Temperature coefficient of VOC(β) = -0.39%/°C
- Temperature coefficient of ISC(α) = +0.033%/°C
- Temperature coefficient of Pmax = -0.44%/°C
- Bypass diodes to reduce loss in partial shadow
- IP65
- CE Standard
- Performance test data for each module