


70 Watt

POLY CRYSTALLINE MODULE 72x(156mmx39mm)



www.risenenergy.com
THE POWER OF RISING VALUE



Electrical Characteristics

Model	Pm(Wp)	Tolerance	Vm(V)	Im(A)	Voc(V)	Isc(A)
SYP70S	70W	+3%	34.6	2.03	43.2	2.26

Valued at STC (AM 1.5, 1000W/m², 25°C)

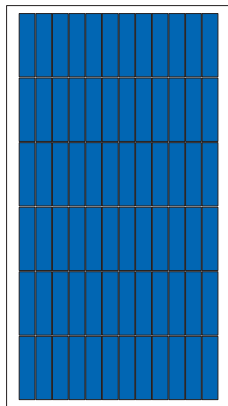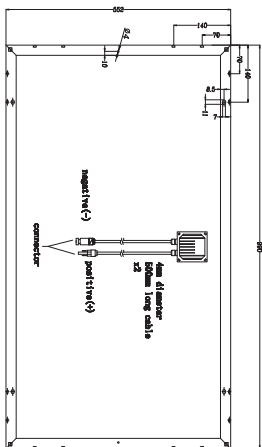

Specifications

- Number of poly crystalline solar cell 72pcsx(156mmX39mm)
- Aluminum frame, dimension 990x552x25mm
- Weight 6.1kg
- Temperature coefficient of VOC(β) = -0.39%/°C
- Temperature coefficient of ISC(α) = +0.033%/°C
- Temperature coefficient of Pmax = -0.44%/°C
- Bypass diodes to reduce loss in partial shadow
- IP65
- CE Standard
- Performance test data for each module