

10% transmittance poly-crystal modules-60 cells  
10%透光多晶组件—60片



### 结构参数

## Mechanical Specifications

Parameter/参数	Value/数值
Cell Type/电池类型	Polycrystalline/多晶硅 (156mm*156mm)
Solar Cells/电池片数量[片]	60(6*10)
Length*Width*Thickness/长*宽*厚[mm]	1658*992*6
Weight/重量[Kg]	23.0
Front Glass/前板玻璃[mm]	2.5 (Low iron semi tempered coated glass/低铁压花半钢化镀膜玻璃)
Interlayer/中间层[mm]	EVA/POE/PVB
Back Glass/背板玻璃[mm]	2.5 (Float semi tempered glass/浮法半钢化玻璃)
Junction Box/接线盒	IP67 Rated, 3 by-pass diodes /3个旁路二极管, 满足IP67安全防护等级
Connector/连接器	Multi-Contact MC-4(or equivalent)/MC-4连接器 (或同类产品)
Transmittance/透光率[%]	10
Maximum Load Capacity/机械负载[Pa]	2400(风压)/5400(雪压)

### 电学性能

## Electrical Characteristics

Parameter/参数		DP60-255	DP60-260	DP60-265	DP60-270
STC : 光谱 AM1.5, 辐照度 1000W/m <sup>2</sup> , 电池温度25°C	Maximum Power at STC [Pmax]/标测下最大功率 [W]	255	260	265	270
	Open Circuit Voltage [Voc]/开路电压 [V]	37.90	38.30	38.40	38.60
	Short Circuit Current [Isc]/短路电流 [A]	8.74	8.81	8.85	8.89
	Voltage at Maximum Power point[Vm]/最大功率点电压 [V]	31.10	31.50	31.70	31.90
	Current at Maximum Power point[Im]/最大功率点电流 [A]	8.21	8.26	8.36	8.45
	Power Tolerance /功率偏差 [%]	0~+3%			
NOCT : 光谱 AM1.5, 辐照度 800W/m <sup>2</sup> , 环境温度20°C, 风速1m/s	Module Efficiency/转换效率 [%]	15.5	15.8	16.1	16.4
	Maximum Power at NOCT [Pmax]/NOCT下最大功率 [W]	190	193	197	201
	Open Circuit Voltage [Voc]/开路电压 [V]	35.00	35.20	35.40	35.60
	Short Circuit Current [Isc]/短路电流 [A]	7.18	7.22	7.34	7.41
	Voltage at Maximum Power point[Vm]/最大功率点电压 [V]	28.20	28.40	28.50	28.60
	Current at Maximum Power point[Im]/最大功率点电流 [A]	6.74	6.79	6.91	7.03
Power Tolerance /功率偏差 [%]	0~+3%				

### 工作范围

## Scope of Work

Parameter/参数	Unit / 单位	Value/数值
Maximum System Voltage /最大系统电压	[V]	1000 DC(IEC)或1500 DC(IEC)
Operating Temperature /工作温度范围	[°C]	-40~85
Nominal Operating Cell Temperature/额定电池工作温度	[°C]	45±3
Maximum rated current/最大保险丝额定电流	[A]	15

### 温度系数

## Temperature Coefficients

Parameter/参数	Unit / 单位	Value/数值
Temperature Coefficient of Pmax/最大功率温度系数	[%/°C]	-0.42
Temperature Coefficient of Voc/开路电压温度系数	[%/°C]	-0.33
Temperature Coefficient of Isc/短路电流温度系数	[%/°C]	0.04


### 包装信息

## Package Configuration

Package Size	Container	20'GP	40'GP	40'HQ
1780×1120×1160mm	pieces for pallet	36	36	36
	pallets for Container	6	13	26
	pieces for Container	216	468	936

### 结构视图

## Module Layout

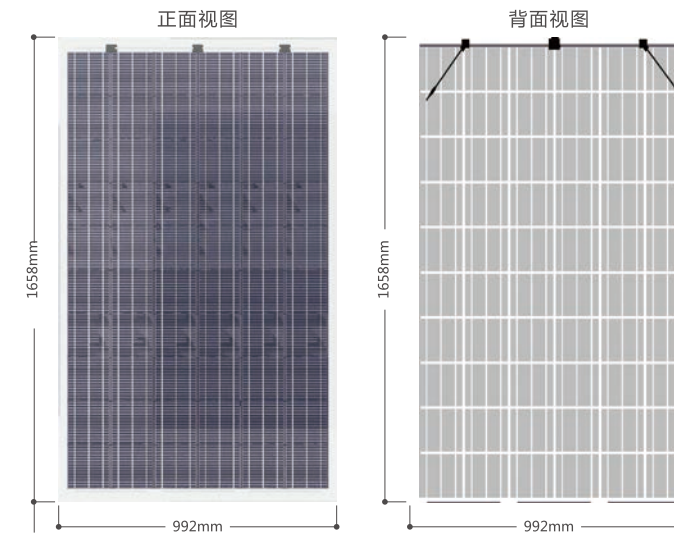


### 总装图

## Components

- Front Glass (2.5mm Low iron semi tempered coated glass)
- Encapsulant (EVA/POE/PVB)
- Cell Type (Mono crystalline 156mm×156mm)
- Encapsulant (EVA/POE/PVB)
- Back Glass (2.5mm Float semi tempered glass)

### 曲线图

## Electrical curves

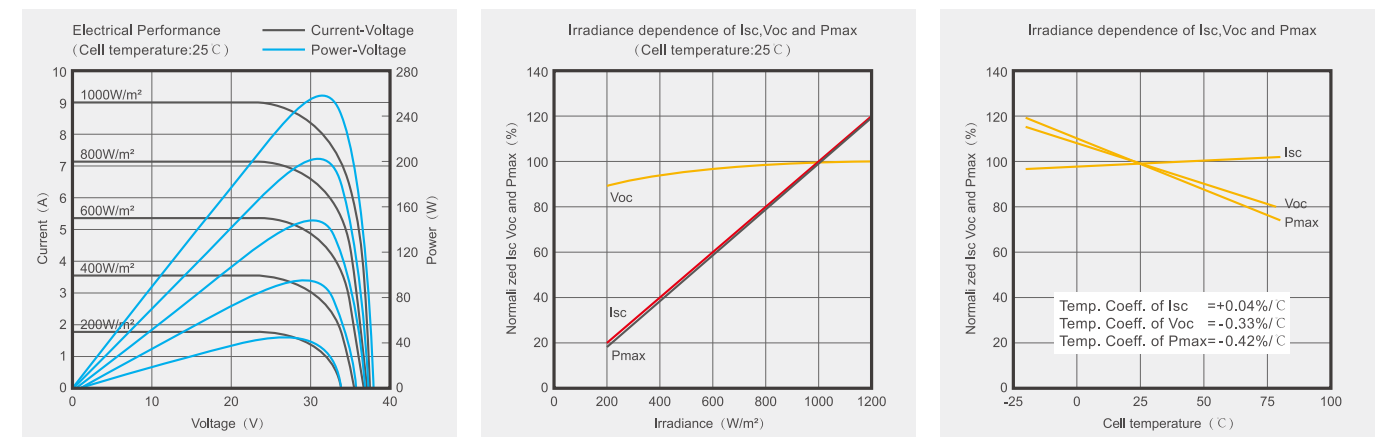

### 输出功率线性质保

### 业内领先的线性质保

### 认证标识

### Certification

