

ABB central inverters

ULTRA-750/1100/1500

750kW to 1560kW



ABB's utility-scale ULTRA inverters combine high efficiency with a wide input voltage range and multiple maximum power point trackers.

The inverters can be configured with up to four independent, high-speed maximum power point trackers (MPPT).

Each precise MPPT accommodates one of the widest input voltage ranges in the market (470 to 900 Vdc) to generate more energy and maximize the return on investment.

The ULTRA inverter is a flexible and efficient platform.

Modular design increases uptime and reduces service and maintenance costs. The low cost of ownership, higher energy production and ease of maintenance combine to make the ULTRA inverter the ideal choice for utility-scale solar projects.

ULTRA inverters are rugged.

The liquid-cooled, corrosion-resistant ULTRA inverters are certified by CSA to UL50E type 4X (meets NEMA 4X) and ideally suited for any environmental condition.

ULTRA inverters are durable for long life.

ABB ULTRA inverters utilize an advanced closed-loop liquid cooling system that limits both component temperatures and temperature cycling. ULTRA inverter film capacitors have longer life expectancy than traditional electrolytic capacitors. Generous component derating guidelines are followed. The combination of design and ABB commitment to service ensures the inverter will provide a long-term return on investment.

Highlights:

- The ULTRA inverter operates at high efficiency (98.4% peak, up to 98% CEC).
- The wide input voltage range maximizes energy production.
- Liquid cooling increases reliability of critical components.
- ULTRA inverters are compatible with all types of PV technologies.
- The enclosure is certified to UL50E type 4X (NEMA 4X).
- The inverter output is 690 Vac, three-phase, DELTA configuration.
- The ULTRA inverter operates with up to four MPPT connections.
- ULTRA inverters are certified by CSA to UL1741.

*Inverter shown with optional sunshade and louvers.




Technical data and types

| Type code | ULTRA-750-TL-OUTD-X-US-690 | | | | ULTRA-1100-TL-OUTD-X-US-690 | | | | ULTRA-1500-TL-OUTD-X-US-690 | | | |
|--|---|-------|-------|-------|-----------------------------|-------------|-------------|-------------|---------------------------------------|--------|--------|--------|
| X = | -1 | -2 | -3 | -4 | -1 | -2 | -3 | -4 | -1 | -2 | -3 | -4 |
| Rated output power (Pac) (active) | 780kW | 750kW | 780kW | 750kW | 1170kW | 1000kW | 1170kW | 1000kW | 1560kW | 1500kW | 1560kW | 1500kW |
| Rated output power (apparent) | 780kVA | | | | 1170 kVA | 1115 kVA | 1170 kVA | 1115 kVA | 1560kVA | | | |
| Input side (DC) | | | | | | | | | | | | |
| Absolute maximum voltage | 1000Vdc | | | | | | | | | | | |
| MPPT voltage range | 470-900Vdc | | | | | | | | | | | |
| MPPT range at full power (89°F/ 30°C) | 585-850Vdc | | | | 585-850 Vdc | 540-850 Vdc | 585-850 Vdc | 540-850 Vdc | 585-850Vdc | | | |
| MPPT range at full power (120°F/50°C) | 650-850Vdc | | | | | | | | | | | |
| Maximum current per 390kW inverter module | 700A | | | | | | | | | | | |
| Maximum combined current | 1400A | | | | 2100A | | | | 2800A | | | |
| Number of independent MPPT (multi-master) | 2 | | | | 3 | | | | 4 | | | |
| Number of independent MPPT (master-slave) | 1 | | | | 1 | | | | 1 | | | |
| Number of DC inputs | 10 | | | | 15 | | | | 20 | | | |
| DC Connections (Cu or Al) | Cu; 1 x1000 MCM or 2 x 300 MCM, max. | | | | | | | | Al; 1 x 1000 MCM or 2 x 400 MCM, max. | | | |
| Array Grounding | Negative or positive | | | | | | | | | | | |
| DC cable entry | Bottom | | | | | | | | | | | |
| Inverter output side (AC) | | | | | | | | | | | | |
| Rated voltage | 690Vac (3 Phase / 3 Wire) | | | | | | | | | | | |
| Operating range ¹ | 607-759Vac (3 Phase / 3 Wire) | | | | | | | | | | | |
| Grid frequency (adjustment range) | 59.3-60.5Hz (57-63Hz) | | | | | | | | | | | |
| Maximum output current | 655A | | | | 983A | 932A | 983A | 932A | 1310A | | | |
| Power factor control range | 1.0 Nominal (adjust ±0.90 to ±0.99) | | | | | | | | | | | |
| Total harmonic distortion (@ rated output power) | <3% | | | | | | | | | | | |
| AC cable size (Cu or Al) | Up to 6 cables per phase (maximum 1000 MCM), 90°C terminals, 3/8" threaded stud | | | | | | | | | | | |
| AC cable entry | Bottom | | | | | | | | | | | |
| Input protection devices | | | | | | | | | | | | |
| Reverse polarity protection | Yes | | | | | | | | | | | |
| Overvoltage protection type | SPD (Class II) | | | | | | | | | | | |
| DC switch per 390kW inverter | 1000A / 1000V | | | | | | | | | | | |
| Fuse size on each input | (125-400A) / 1000V | | | | | | | | | | | |
| PV array isolation control | According to NEC | | | | | | | | | | | |
| Output protection devices | | | | | | | | | | | | |
| Anti-islanding protection | IEEE 1547 | | | | | | | | | | | |
| Overvoltage protection | SPD (Class II) | | | | | | | | | | | |
| AC fuse per 390kW inverter module | Yes | | | | | | | | | | | |
| AC circuit breaker (adjustable) | 800 | | | | 1200 | | | | 1600 | | | |
| Night time disconnect | Automatic | | | | | | | | | | | |

1. The active / reactive power output varies as a function of output voltage

Block diagram of ULTRA-1500 -TL-OUTD

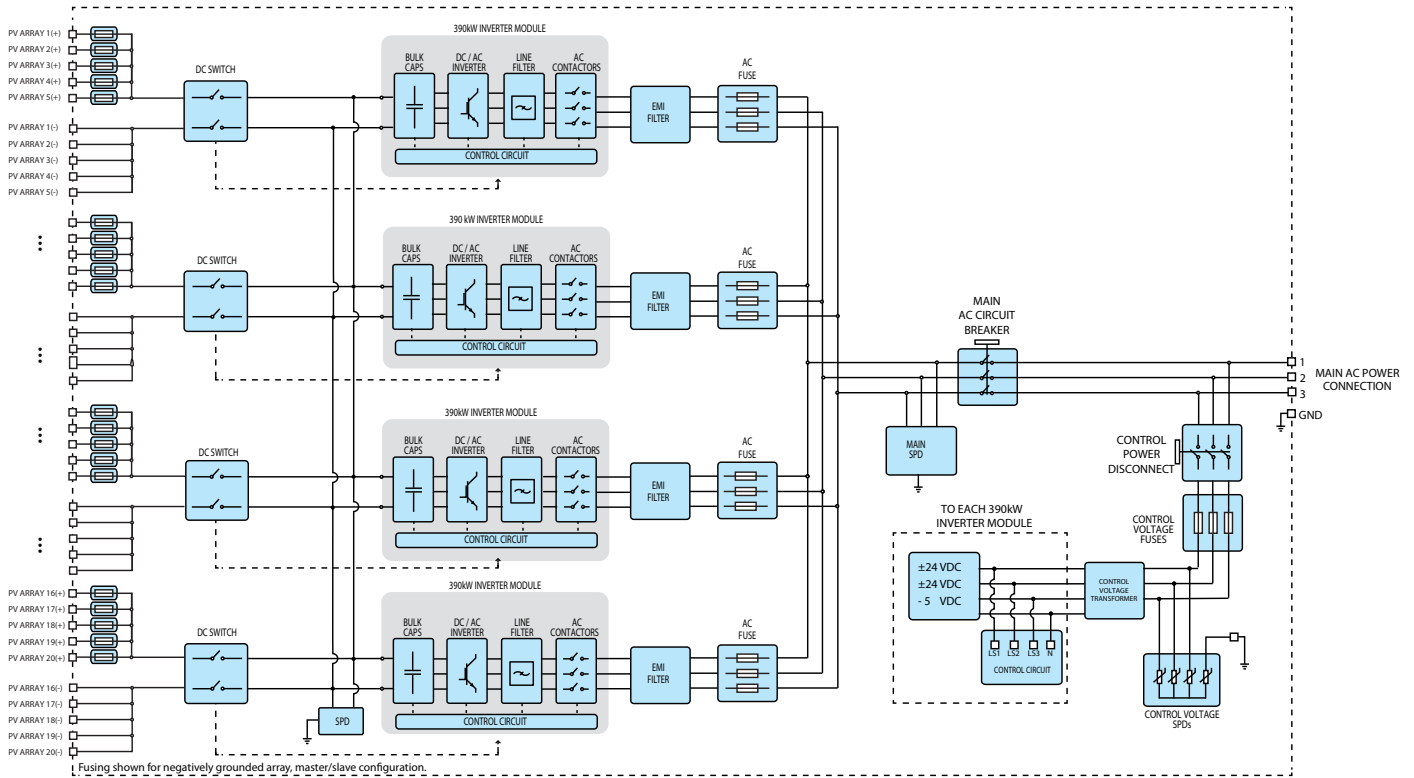


Technical data and types

| Type code | ULTRA-750-TL-OUTD-X-US-690 | | | | ULTRA-1100-TL-OUTD-X-US-690 | | | | ULTRA-1500-TL-OUTD-X-US-690 | | | |
|--|---|-------|-------|-------|--|-------|-------|-------|--|-------|-------|-------|
| X= | -1 | -2 | -3 | -4 | -1 | -2 | -3 | -4 | -1 | -2 | -3 | -4 |
| Efficiency | | | | | | | | | | | | |
| CEC efficiency | 97.5% | 97.5% | 98.0% | 98.0% | 97.5% | 97.5% | 98.0% | 98.0% | 97.5% | 97.5% | 98.0% | 98.0% |
| Maximum efficiency | 98.4% | | | | | | | | | | | |
| Operating performance | | | | | | | | | | | | |
| Stand-by consumption/night-time power loss | 302W | 302W | 347W | 347W | 329W | 329W | 382W | 382W | 374W | 374W | 430W | 430W |
| Auxiliary power supply connection type | 690Vac / 3 Phase | | | | | | | | | | | |
| Inverter internal power consumption | <0.50% | | | | <0.40% | | | | <0.50% | | | |
| Environmental | | | | | | | | | | | | |
| Ambient temperature range, operating | -4°F to 122°F (-20°C to 50°C) with derating above 122°F (50°C) | | | | | | | | | | | |
| Noise emission level at 1m (EN62109) | <78dBA | | | | | | | | | | | |
| Maximum operating altitude without derating | 6560ft (2000m) | | | | | | | | | | | |
| Relative humidity | 0-100%, condensing | | | | | | | | | | | |
| Communication | | | | | | | | | | | | |
| Communication protocol | RS-485, Modbus RTU, Modbus TCP (optional), Ethernet IP (optional) | | | | | | | | | | | |
| User-interface | 5.7" touchscreen LCD | | | | | | | | | | | |
| Monitoring system | AURORA Universal, PVI-AEC-EVO | | | | | | | | | | | |
| Mechanical Specifications | | | | | | | | | | | | |
| Environmental protection rating | UL50E Type 4X (NEMA 4X) | | | | | | | | | | | |
| Seismic | IBC 2012 (ASCE 7-10), Sds = 2.0g, Risk Category I and II | | | | | | | | | | | |
| Cooling | Liquid cooled with on-board heat exchanger | | | | | | | | | | | |
| Dimension (Height x width x depth) | 115in x 118in x 58in (2912mm x 3003mm x 1470mm) | | | | 115in x 146in x 58in (2912mm x 3703mm x 1470mm) | | | | 115in x 173in x 58in (2912mm x 4403mm x 1470mm) | | | |
| Unit weight (approximate) | 9000lbs (4100kg) | | | | 10500lbs (4800kg) | | | | 12000lbs (5500kg) | | | |
| Swappable 390kW power conversion module weight | >121lbs (55kg) | | | | | | | | | | | |
| Safety | | | | | | | | | | | | |
| Marking | CSA, UL1741 | | | | | | | | | | | |
| Safety and EMC standards | IEEE1547, IEEE1547.1, NERC PRC-024-1, WECC, BDEW | | | | | | | | | | | |
| Utility interconnect standards | | | | | | | | | | | | |
| Warranty | | | | | | | | | | | | |
| Standard warranty | 5 years | | | | | | | | | | | |
| Extended warranty | 10, 15, 20 years | | | | | | | | | | | |

1. The active / reactive power output varies as a function of output voltage

Maximize yields with high efficiency and advanced grid support

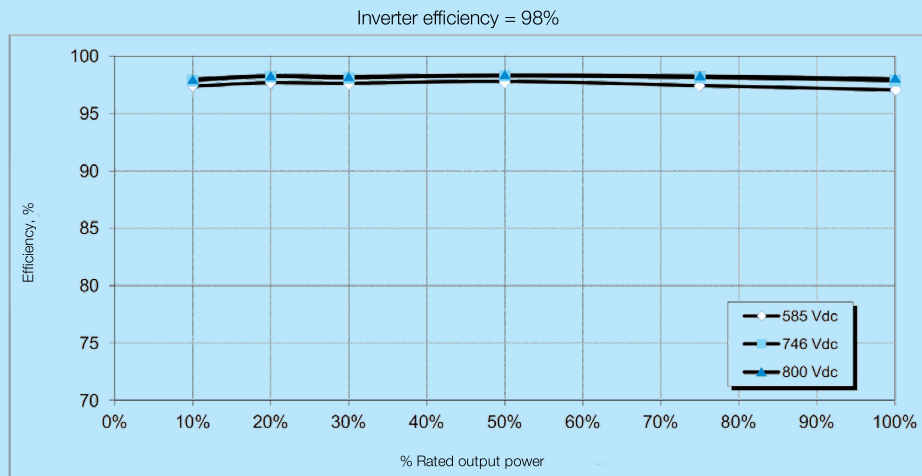

Maximum energy and return on investment

ABB ULTRA inverters have industry-leading peak and weighted efficiencies. Optimized and accurate system control, an industry-leading MPPT algorithm, and a high-efficiency power converter design ensure that maximum energy is delivered to the power distribution network from the PV modules. For plant owners this translates into a high rate of return.

Proven components

The inverters comprise proven and reliable components, with a long track record of performance in demanding applications and harsh environments. Equipped with extensive electrical and mechanical protection, the inverters operate reliably for the life of the plant.

Multi-stage modular design

ULTRA inverters have a two-stage modular architecture for maximum design flexibility. The two-stage topology results in a wide MPPT window and a high (690Vac) output voltage. The modular design (390kW blocks) allows the integrator to choose an inverter with a master-slave or multimaster configuration. This allows integrators to optimize production for each site and reduces installation and service times.

Effective connectivity to the power distribution network

ABB's transformerless ULTRA inverters enable system integrators to design a PV power plant using the optimum combination of different inverter power ratings. Inverters are connected to the medium voltage (MV) power distribution network either centrally or in a distributed architecture, depending on the plant design and size.

Advanced grid support features

ABB ULTRA inverters include all the latest grid support and monitoring features including active/reactive power curtailment, low/high voltage ride through, power factor and reactive power control.

All these features can be accessed through a supervisory control and data acquisition (SCADA) system. Voltage and frequency droop functions can be enabled for specific applications.



High total performance

- High efficiency (CEC listed)
- Wide MPPT operating range
- Efficient maximum power point tracking
- Liquid-cooled design for a 20-year life

Modular architecture

- Higher up time
- Compact and easy to service
- All front-accessible components
- Integrated and flexible DC input cabinet
- Integrated station design available

Full grid support functionality

- Power factor operation, Q priority mode
- Voltage regulation, active power curtailment
- Droop control functions, VRT, FRT

Extensive protection

- AC output circuit breaker with remote operation
- DC and AC fuses for redundant protection
- DC and AC surge protection standard

Grid code compatibility

- IEEE1547 and NERC PRC-024-1 (CSA-approved)
- Country-specific grid code compliance
- Adjustability to various local utility requirements
- Meets international utility requirements

Proven technology

- Based on ABB's market-leading ULTRA technology designed for utility scale PV
- NEMA 4X design with closed-loop liquid cooling
- Zone 4 seismic design

Life cycle service and support

- ABB's extensive global service network
- Extended warranties
- Service contracts
- Technical support throughout the product life

Communication

- Modbus RTU, Modbus TCP, Ethernet IP communication interfaces available
- Optional remote monitoring and SCADA reporting

Model configurations

| Product line | Model | No isolation transformer | For outdoor use | Power option | North American model* | 690Vac 3-Phase delta | Standard options |
|--------------|-------|-----------------------------|-----------------|--------------|-----------------------|---|------------------|
| ULTRA | -750 | -TL | OUTD | -1 | -US | -690 | -ABCDE-FGHJKL |
| | -1100 | | | -2 | | | |
| | -1500 | | | -3 | | | |
| | | | | -4 | | | |
| Model | | Description | | Power option | | Description | |
| -750 | | 750 or 780kW active power | | -1 | | active power = apparent power | |
| -1100 | | 1100 or 1170kW active power | | -2 | | reduced active power compared to apparent power | |
| -1500 | | 1500 or 1560kW active power | | -3 | | increased efficiency, active power = apparent power | |
| | | | | -4 | | increased efficiency, reduced active power compared to apparent power | |

| Standard options | Description | Available options | | |
|------------------|---------------------------------|-------------------------|---------------------|-----------------|
| A | MPPT | S = Single Master/Slave | M = Multiple MPPT** | |
| B | Grounding | S = Solid | R = Resistive | |
| C | Array configuration | N = Negative gnd | P = Positive gnd | |
| D | Fuse block (max fuse size) | 2 = 200 Amps | 4 = 400 Amps | |
| E | Communication | R = Modbus RTU | T = Modbus TCP | I = Ethernet IP |
| F | Zone level monitoring | 1=Yes | 0 = No | |
| G | Programmable MPPT sweep | 1=Yes | 0 = No | |
| H | IR window | 1=Yes | 0 = No | |
| J | Leakage current monitor | 1=Yes | 0 = No | |
| K | Array ground insulation monitor | 1=Yes | 0 = No | |
| L | Cable glands | 1=Yes | 0 = No | |

*CE-marked, 50Hz inverter also available

**Resistive grounding only.

Support and service

ABB supports its customers with a dedicated, global service organization in more than 60 countries, with strong regional and national technical partner networks providing a complete range of life cycle services.

For more information please contact your local ABB representative or visit:

www.abb.com/solarinverters

www.abb.com

© Copyright 2014 ABB. All rights reserved. Specifications subject to change without notice.