


+ Adjustable Triangle Mount




1

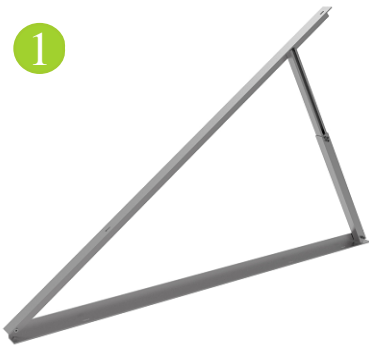

2



3

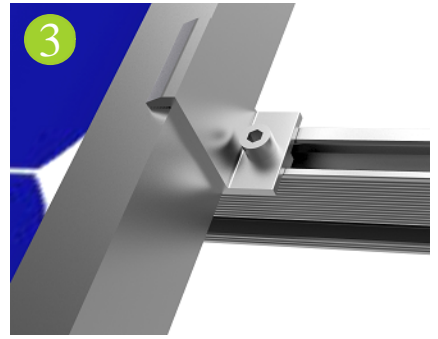

Brief Introduction

Site	Concrete Roof, Ground or Open Field
Angle	10-15 Degree, 15-30 Degree, 30-60 Degree or Customized
Load	Max Wind Load: 60m/s Max Snow Load: 1.4KN/M2
Material	Aluminum 6005-T5, Stainless Steel 304
Standards	ASCE/SEI 7-2005, EN 1999 Eurocode 9, JIS C8955-2011
Features	Anticorrosive
Warranty	10 years and 25 years service time