

## BALLAST WITH 30° ANGLE - Item 23030.1



|                                |   |   |                        |
|--------------------------------|---|---|------------------------|
| <b>DESCRIPTION</b>             | Sun Ballast is mainly made of concrete, which ensures low wear over time and high resistance against the harshest weather conditions. |   |                        |
| <b>APPLICATION</b>             | Any type of flat or low-pitched roof with up to 10° slope, on the ground, on compacted grounds with inert materials or flooring.      |   |                        |
| <b>MODULE TILT ANGLE</b>       | 30°   | <b>NUMBER PER PALLET</b>                  | 10                     |
| <b>BALLAST WEIGHT</b>          | 58 kg   | <b>PALLET DIMENSIONS</b>                  | 86 cm x 86 cm h= 92 cm |
| <b>DISTANCE BETWEEN PANELS</b> | Vertical: from 120 to 150 cm<br>Horizontal: from 100 to 120 cm  | <b>OVERALL PALLET WEIGHT</b>              | 500 kg                 |
| <b>PV MODULE ORIENTATION</b>   | Horizontal, Vertical  | <b>PV PANEL DIMENSIONS AS PER DRAWING</b> | 165 cm x 99,2 cm       |


### PANEL INSTALLATION ON FLAT ROOFS




**30° BALLAST**  
Item 23030.1

**BALLAST DIMENSIONS AND PANEL HEIGHT FROM THE GROUND - UNIT OF MEASUREMENT cm  
HORIZONTAL PANEL INSTALLATION**

FRONT VIEW

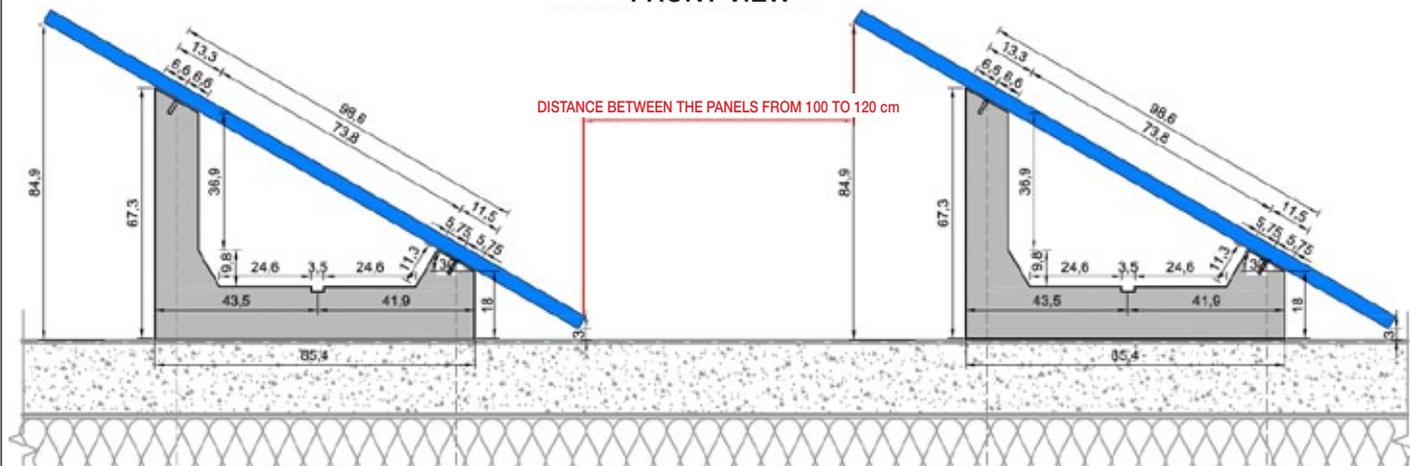


TOP VIEW

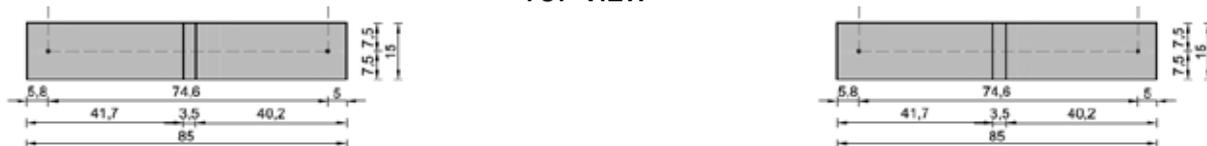

**GENERAL NOTES**

For information, please visit [www.sunballast.it](http://www.sunballast.it)

FRONT VIEW

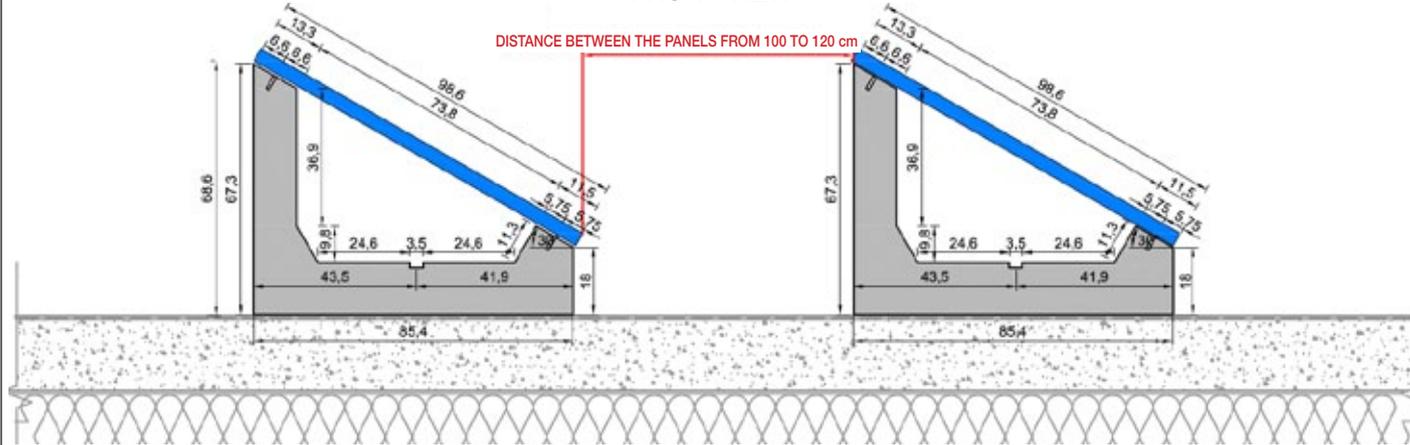

**BALLAST VIEW ON FLAT ROOF**

