




※ Model No. : HS-130W/12V

◆ (Physical specification)

- Solar cells : Mono Cells (19.0%)
- Front Cover : Low Iron Tempered Glass (3.2mm)
- Back Cover : White Sheet (0.32mm)
- Dimension : 660 X 1,206 X 35mm
- Weight : About 12.0kg

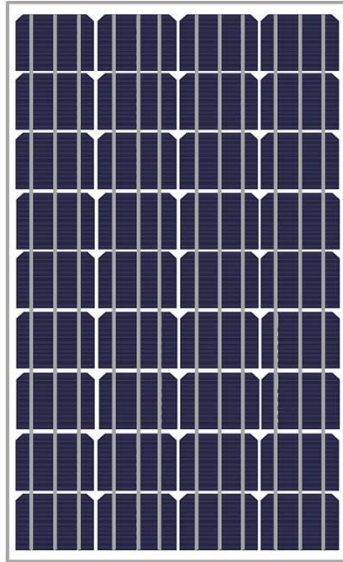


◆ (Technical Specification)

(Standard Test Condition (STC) : Irradiance 1KW/m², Spectrum 1.5 Air Mass, Temperature 25℃)

- Peak Power (P max) : 130W
- Open Circuit Voltage (Voc) : 21.6V
- Short Circuit Current (Isc) : 7.50A
- Voltage @ peak Power (Vmp) : 18.0V
- Current @ peak Power (Imp) : 7.23A

◆ (Drawing)

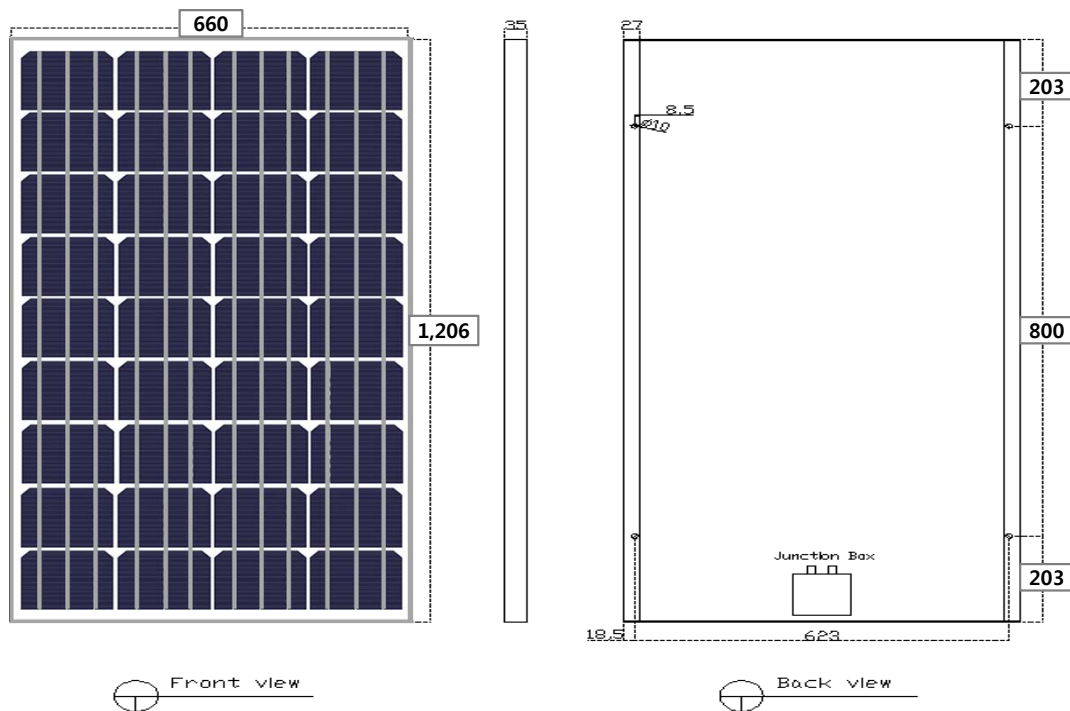

• Office : #815 Shin Dong A B/D, 2199 Dae Wha, Il San-Seo, Go Yang City , Korea (411-804)

• Tel : +82-31-905-9950 (Rep), Fax : +82-31-905-9953

• Factory : Chung Ju 1 Industrial complex, 1133-4, Yong Tan, Chung Ju City, Korea (380-250)

• Tel : +82-43-853-3600 (Rep), Fax : +82-43-853-3617

• E-mail : Info@hssolar.co.kr

• Website : <http://www.solarmodule.co.kr>, <http://www.hssolar.co.kr> <http://www.solarcells.co.kr>,