


产品特性/product features

4BB-156 多晶太阳能电池 /4BB-156 POLY-CRYSTALLINE SOLAR CELLS

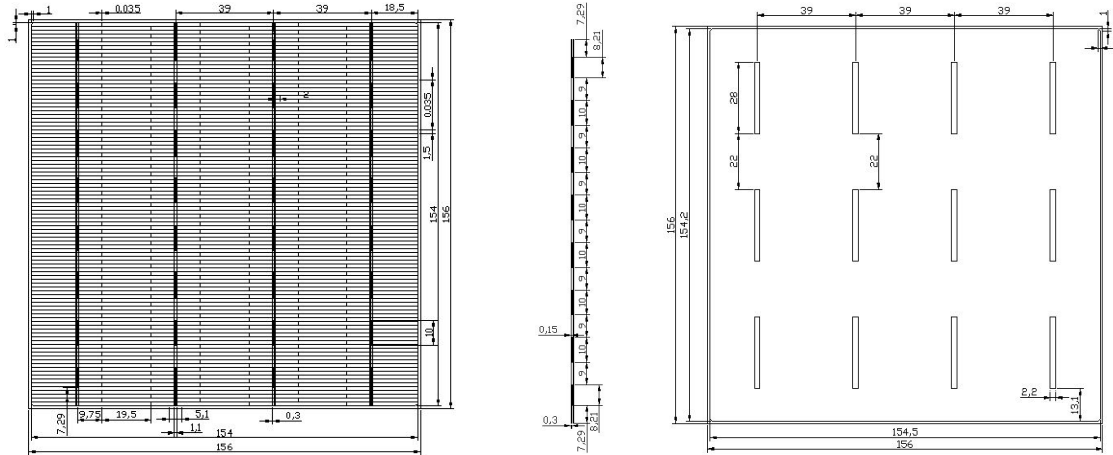

正面图形

FRONT DESIGN

主栅图形

BUSBAR DESIGN

背面图形

BACK SIDE DESIGN

MODEL (%)	Power Pmpp (W)	Max.Power Current Impp(A)	Short Circuit Current Isc(A)	Max.Power Voltage Vmpp(V)	Open Circuit Voltage Voc(V)
18.40	4.477	8.342	8.838	0.537	0.635
18.30	4.453	8.323	8.818	0.536	0.634
18.20	4.429	8.305	8.797	0.535	0.633
18.10	4.404	8.287	8.785	0.534	0.633
18.00	4.380	8.264	8.763	0.533	0.632
17.90	4.356	8.239	8.741	0.532	0.631
17.80	4.331	8.218	8.714	0.531	0.631
17.70	4.307	8.199	8.696	0.530	0.630
17.60	4.283	8.162	8.663	0.529	0.629
17.4	4.234	8.103	8.609	0.526	0.627
17.2	4.185	8.041	8.550	0.524	0.624

温度系数:

TkVoltage: $-0.34\%/K$

TkCurrent: $0.045\%/K$

TkPower: $-0.47\%/K$