

70Watts

Compact designed PV modules Multi (Poly) - crystalline PV modules

Ekarat Solar's compact 70 Watts PV module is produced under a stage of the art automatic assembly machines to ensure a consistency and reliability of production quality. The compact PV module is commonly used for wide range applications such as Battery charger, Street Lamppost, Garden Lamppost, Pumping System, and specially Solar Home System.

High efficiency module, more than 12%, is a result of solar cell's superior power output, which has been developed by our own solar cell factory. More over other component materials are also selected to comply with international standards such as IEC and TISI. These create a customer's confidence ensured with a manufacturing based 20 years limited warranty.



- Choice of Low iron tempered glass, which allows a high light transmission rate with a great robustness or Normal glass for economical application.
- EVA encapsulate sheet, back-sheet, and clear anodized aluminum frame are technically equipped to protect the module against all weather condition.
- Junction box with IP65 to ensure water proof and prolong lifetime operation.
- Special cable with connectors is offered as option for easy interconnection.
- Bypass diode included in promptly provided junction box is to prevent the power dropped by partial shading.

Electrical Characteristics

Model No.	ES2070
Maximum power (Pmax)	70 W
Power tolerance	± 3%
No. of connected cells	36
Voltage of Pmax (Vmp)	17.6 V
Current at Pmax (Imp)	4.38 A
Short - Circuit current (Isc)	5 A
Open - Circuit voltage (Voc)	21.92 V
Temperature Coefficient of Voc	-0.0968 V / °C
Temperature Coefficient of Isc	+ 2.4 mA / °C
Temperature Coefficient of power	-0.4507 % / °C
Maximum series fuse rating	15 A
Maximum voltage system	1000 V

CONTACT US: Ekarat Solar Co., Ltd.

9/291 U.M. Tower 28th Fl., Ramkhamhaeng Rd., Suanluang, Bangkok 10250 Thailand

Tel. +66 2 719 8777

e-mail info@ekarat-solar.com

Fax. +66 2 719 8760

Web site www.ekarat-solar.com

Specifications subject to technical changes

© Ekarat Solar Co., Ltd.

BQ-S-024-0-02/03/53-1/2




Renewable Energy: Photovoltaic Modules



Mechanical Characteristics

Dimension	1226 x 550 x 38 mm.
Weight	8.1 kg.
Dimension tolerance	± 1 mm.
Size of carton	1150 x 1420 x 1346 mm.
Junction Box	Degree of protection: IP65 and compatibility with 2.5 - 4.0 mm cross section cable size.
Diode	Silicon or Schottky By - pass diode for every 18 cells connection.
Frame	Anodized Aluminum.
Construction structure	Front: High light transmission tempered glass with 3.20 mm thickness, or Normal glass as option. Back: Weather proof back sheet material. Laminated Material: EVA.
Package	25 modules per carton.


Module drawing diagram

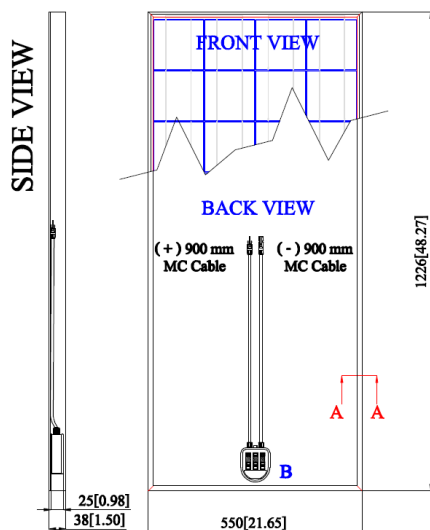

IV - curves

Irradiance

(1,000 W/m², 800 W/m², and 600 W/m²)

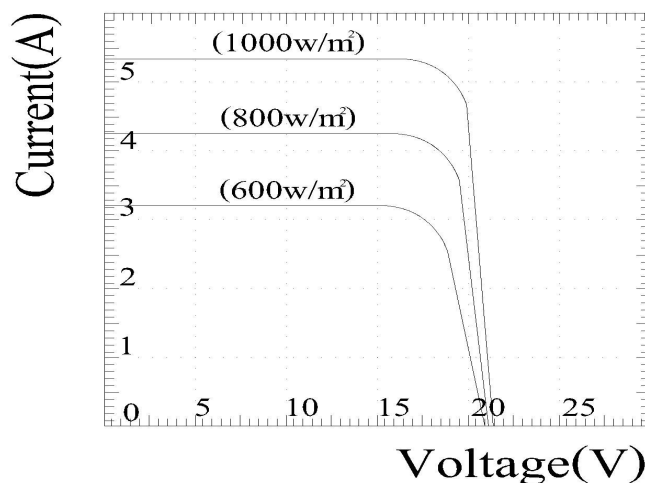

Model: 70W

These data represent the performance of typical modules as measured at their out put terminals, and do not include the effect of such additional equipment as diodes or cables. The data are based on measurements made in accordance with ASTM E1036-85 corrected to SRC (Standard Reporting Conditions, also known as STC or Standard Test Conditions), which are:

- Illumination of 1kW/m² (1sun) at spectral distribution of AM1.5 (ASTME892-87 global spectral irradiance);
- Cell temperature of 25°C.

CONTACT US: Ekarat Solar Co., Ltd.

9/291 U.M. Tower 28th Fl., Ramkhamhaeng Rd., Suanluang, Bangkok 10250 Thailand

Tel. +66 2 719 8777

e-mail info@ekarat-solar.com

Fax. +66 2 719 8760

Web site www.ekarat-solar.com

Specifications subject to technical changes

© Ekarat Solar Co., Ltd.

BQ-S-024-0-02/03/53-2/2