


Model No.: SW085M

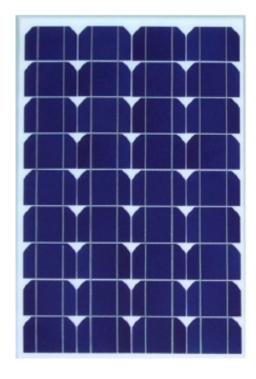

Sunworth solar, we commit ourselves to R&D, manufacture and technical innovation on pv modules and solar power system.

To provide high quality products with various specifications to customers is always our pursuit.

Characteristics:

- Use high quality solar cells to advanced encapsulation
- Adopt high transparent low-iron tempered glass, high quality anti-UV EVA and back sheet.
- With multi-ply performance testing for each module, to ensure the product quality and output performance.
- Using anodization aluminum frame with anticorrosion, to ensure solar module working under extremely and badly outdoors environment

Warranty:

➤ Guarantee the workmanship for 3 years, 90% power output for 10 years, and 80% power output for 20 years.

Rev1.1 2011





Solar Module

Production application:

- Independent power supply for remote area,i.e. house lighting etc.
- > Solar power system

- Solar lighting,i.e.solar garden lamp,solar lawn lamp etc.
- > Other samll solar power supply

Electrical characteristics:

	SW085M
Max-power:Pm(W)	85W
Max-power voltage: Vm(V)	18.6V
Max-power current: Im(A)	4.57A
Open-circuit voltage:Voc(V)	22.5V
Short-circuit current: Isc(A)	4.97A
Max-system voltage(VDC)	600V
Operating temperature(°ℂ)	-40℃~+85℃
Power tolerance	0~ +6%


^{*}STC condition: 1000 W/m2,1.5AM and 25℃ cell temperature.

Mechanical characteristics:


Type of solar cell	Monocrystalline
Lay up of solar cell	36(4*9)PCS
Dimension of solar module	860*660*25mm
Gross weight of solar module	6.2Kg
Front Cover	Low-iron Tempered glass/ 3.2mm
Frame	Anodization aluminum
Junction Box (protection degree)	IP65
Hailstone Impact	25mm at 23m/s




I-V curves:

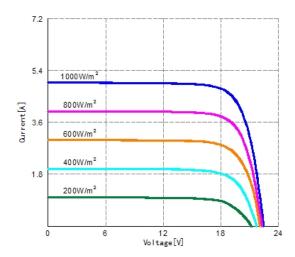

Dimensions:

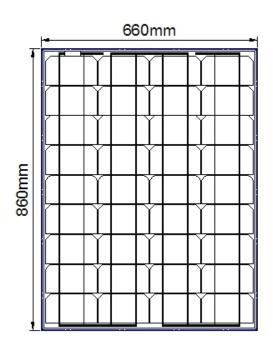

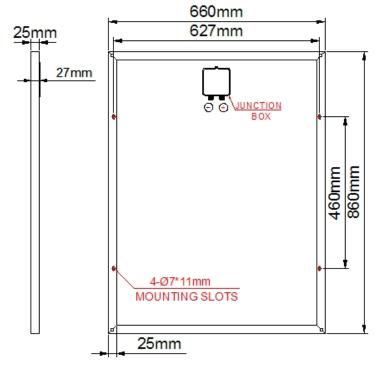

Rev1.1 2011